




Standard Features

- Fully Enclosed Wiring w/LED Lights
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Spare tire and tool tray included
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Frame:	8 X 2 HSS
Suspension:	Multi-Leaf Spring w/ Equalizer	Ramp:	4,000 lb. Aluminum
Wheels:	235/80R16 E Steel	Crossmember:	3" I-Beam 80 KSI
Brakes:	Electric Self-Adjusting	Tongue:	8 X 2 HSS
Jack:	12,000 lb Side-Wind Bolted	Deck:	HD Fir Plank
Coupler:	21,000 lb Demco Adjustable	Electric Plug:	7 Wire Plug

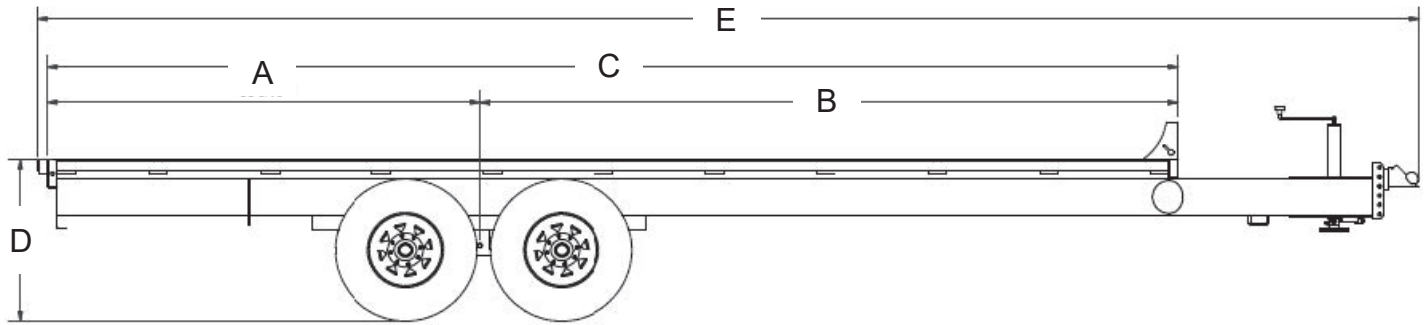

Dimensions

Model	A	B	C	D	E
HBAT7-16	72 3/16"	121 9/16"	193 3/4"	31 5/8"	269 5/8"
HBAT7-18	96 3/16"	121 9/16"	217 3/4"	31 5/8"	293 5/8"
HBAT7-20	96 3/16"	145 9/16"	241 3/4"	31 5/8"	317 5/8"
HBAT7-22	96 3/16"	169 9/16"	265 3/4"	31 5/8"	341 5/8"
HBAT7-24	108 3/16"	181 9/16"	289 3/4"	31 5/8"	365 5/8"

Deck Width

97"

Model	Description	Net Weight	GVWR	Payload Cap.
HBAT7-16	16' 7000 lb. Tandem Axle Black	2,618 lb.	15,400 lb.	12,782 lb.
HBAT7-18	18' 7000 lb. Tandem Axle Black	2,829 lb.	15,400 lb.	12,571 lb.
HBAT7-20	20' 7000 lb. Tandem Axle Black	3,038 lb.	15,400 lb.	12,362 lb.
HBAT7-22	22' 7000 lb. Tandem Axle Black	3,249 lb.	15,400 lb.	12,151 lb.
HBAT7-24	24' 7000 lb. Tandem Axle Black	3,359 lb.	15,400 lb.	12,041 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised June 2024