




Standard Features

- Fully Enclosed Wiring w/LED Lights
- Bolted Fenders
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Stabilizer jacks standard on slide-in ramps
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Frame:	6 X 2 HSS
Suspension:	Multi-Leaf Spring w/Equalizer	Ramp:	Slide In or Flip Up, 4,500 lb
Wheels:	235/80R16 E Steel	Crossmember:	3" I-Beam 80 KSI
Brakes:	Electric Self Adjusting	Tongue:	6 X 2 HSS
Jack:	5,000 lb Top Wind Bolted	Deck:	HD Fir Plank
Coupler:	21,000 lb Demco Adjustable	Electric Plug:	7 Wire RV

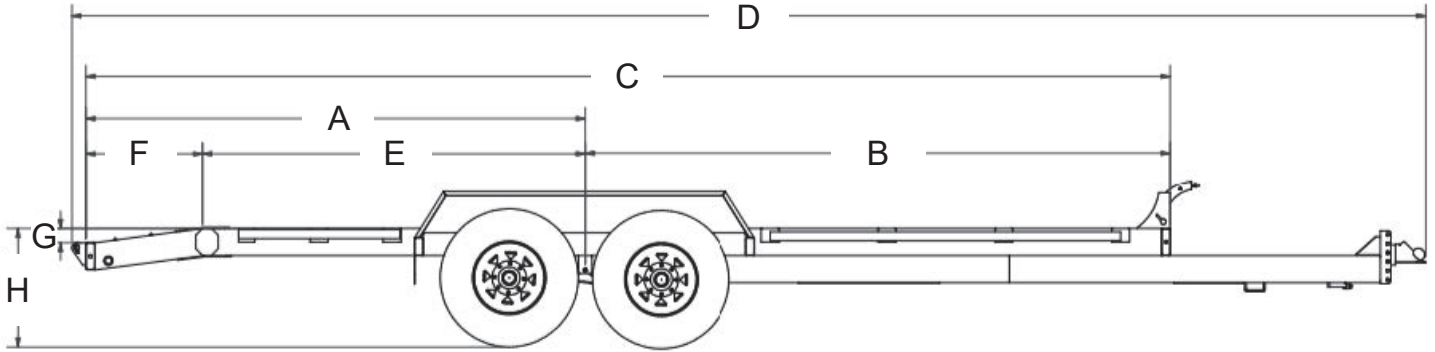

Dimensions

Model	A	B	C	D	E	F	G	H
LBAT7-18 BT	101"	141"	242"	298"	75"	26"	3"	24 1/2"
LBAT7-20 BT	107"	159"	266"	322"	81"	26"	3"	24 1/2"
LBAT7-22 BT	115"	175"	290"	346"	89"	26"	3"	24 1/2"
LBAT7-24 BT	139"	175"	314"	370"	113"	26"	3"	24 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
LBAT7-18 BT	18' 7,000 lb. Tandem Axle Beavertail Black	3,020 lb	15,400 lb	12,380 lb
LBAT7-20 BT	20' 7,000 lb. Tandem Axle Beavertail Black	3,170 lb	15,400 lb	12,230 lb
LBAT7-22 BT	22' 7,000 lb. Tandem Axle Beavertail Black	3,320 lb	15,400 lb	12,080 lb
LBAT7-24 BT	24' 7,000 lb. Tandem Axle Beavertail Black	3,470 lb	15,400 lb	11,930 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2024