



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Cambered radius roof bows
- Aluminum Extrusion Trim Top and Bottom
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- Fully Enclosed Wiring
- Led Exterior and Interior Lights
- One-piece aluminum roof
- 4 Foot aluminum barlocks
- Side vent
- Zinc coated Hardware

Specifications

Axle:	(1) 3,500 lb Lippert Spring	Floor:	3/4" Plywood
Brakes:	None	Walls:	3/8" Plywood
Coupler:	10,000 lb Stamped	Wheels:	205/75R14 C Steel
Jack:	2,000 lb Top-Wind Bolted	Electric Plug:	4 Wire
Side Door:	None	Ramp Rating:	800 lb Midspan
Floor D-Rings:	None		

Options

Rear Door	
Ramp	Barn Style

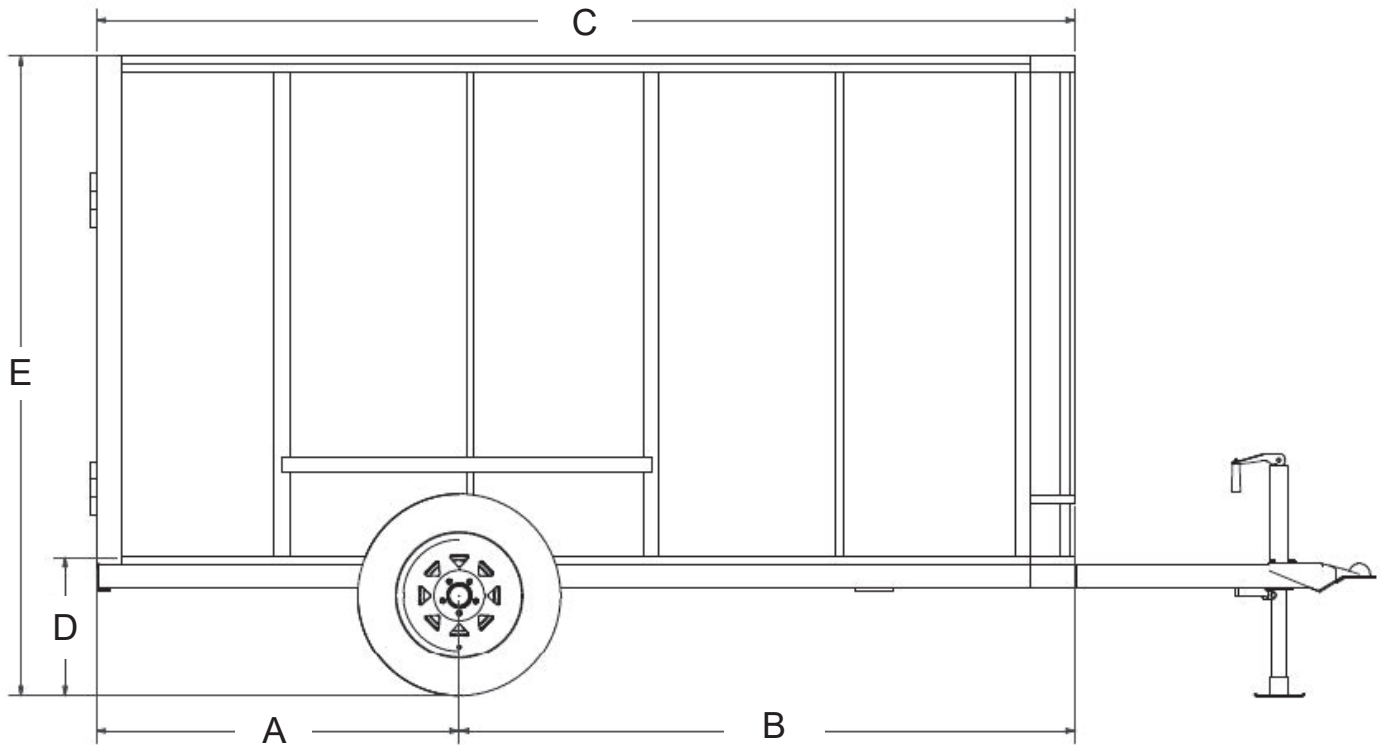

Dimensions

Model	A	B	C	D	E
LCCHS29-510F-64	47"	80"	127"	17 5/16"	84 5/16"
LCCHS29-612F-72	57"	94"	151"	17 5/16"	92 5/16"
LCCHS29-512V-64	47"	98"	145"	17 5/16"	84 5/16"
LCCHS29-614V-72	57"	112"	169"	17 5/16"	92 5/16"

Model	Description	Net Weight	GVWR	Payload Cap.
LCCHS29-510F-64	5' x 10' x 64" wall height, 2,900 lb. Single Axle Flat Nose	1009 lb	2900 lb	1891 lb
LCCHS29-612F-72	6' x 12' x 72" wall height, 2,900 lb. Single Axle Flat Nose	1229 lb	2900 lb	1671 lb
LCCHS29-512V-64	5' x 12' x 64" wall height, 2,900 lb. Single Axle V-Nose	1075 lb	2900 lb	1825 lb
LCCHS29-614V-72	6' x 14' x 72" wall height, 2,900 lb. Single Axle V-Nose	1317 lb	2900 lb	1583 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2024