



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Cambered radius roof bows
- Aluminum Extrusion Trim Top and Bottom
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- Fully Enclosed Wiring
- Led Exterior and Interior Lights
- One-piece aluminum roof
- 4 Foot aluminum barlocks
- Side vent
- Zinc coated Hardware

Specifications

Axle:	(2) 3,500 lb Lippert Spring	Floor:	3/4" Plywood
Brakes:	Electric Self-Adjusting	Walls:	3/8" Plywood
Coupler:	10,000 lb Stamped	Wheels:	205/75R15 C Steel
Jack:	2,000 lb Top-Wind Bolted	Electric Plug:	7 Wire RV
Side Door:	30" x 66" with RV Latch	Ramp Rating:	800 lb Midspan
Floor D-Rings:	None		

Options

Rear Door	
Ramp	Barn Style

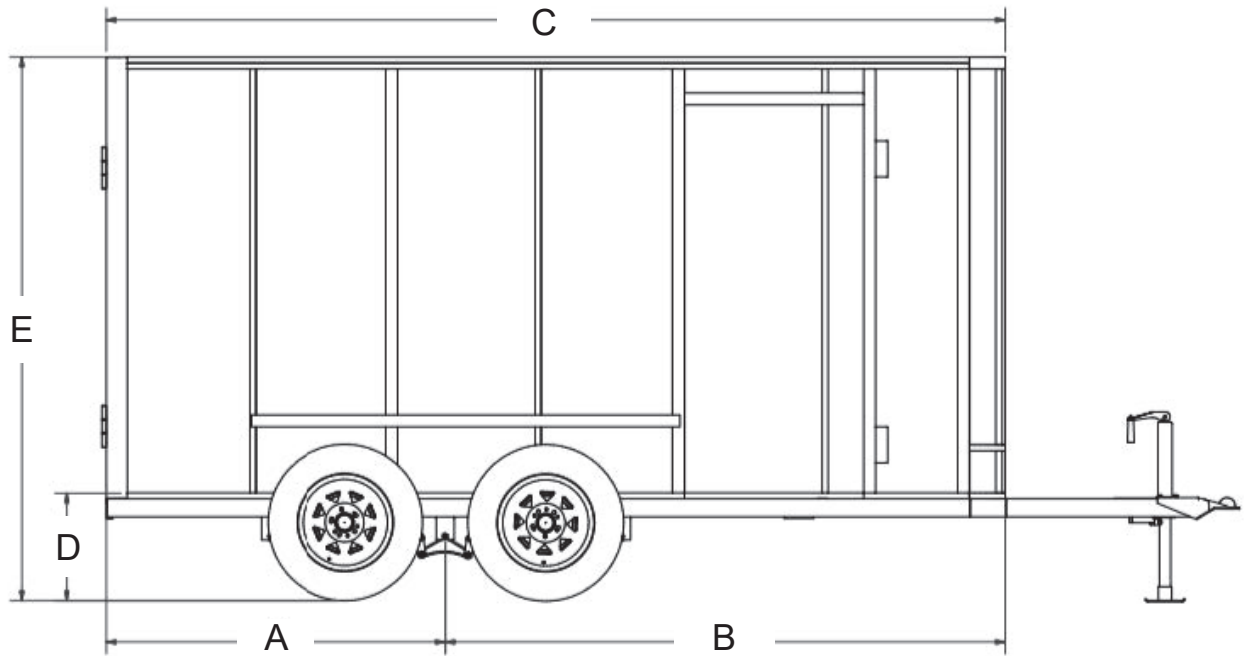

Dimensions

MODEL	A	B	C	D	E
LCHT35-612F-72	57"	94"	151"	17 7/16"	91 15/16"
LCHT35-614V-72	57"	112"	169"	17 7/16"	91 15/16"
LCHT35-614V-78	57"	112"	169"	17 7/16"	97 15/16"

Model	Description	Net Weight	GVWR	Payload Cap.
LCHT35-612F-72	6' x 12' x 72" wall height, 3,500 lb. Tandem Axle Flat Nose	1537 lb	7700 lb	6163 lb
LCHT35-614V-72	6' x 12' x 72" wall height, 3,500 lb. Tandem Axle V-Nose	1645 lb	7700 lb	6055 lb
LCHT35-614V-78	6' x 12' x 78" wall height, 3,500 lb. Tandem Axle V-Nose	1755 lb	7700 lb	5945 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2024