




## Standard Features

- 97.25" Foot Working Deck
- 102" Overall Width
- Breakaway Kit
- Protected Wiring
- LED Lighting Package
- Plank Deck
- Lockable Front Toolbox
- Spring Assist Steel Full Width Max Ramps
- Lippert Brand Axles
- Low Profile Bed, Pierced-Beam Frame
- Radial Tires
- 25,000 lb. Bolt-on Safety Chains & Hooks
- High Tensile Super Lite Beam Crossmembers
- Engineered One Piece Continuous Weld Gooseneck
- Deck 12,000 lb. Bolt-On 13.5" Lift Drop Leg
- Spring Loaded Front Pin
- Dual Wheels
- Engineered Robotically Welded
- Continuous Main Beam
- 3/4" Precambered Deck
- Steel is cleaned with steel shot blast
- Polyurethane Two Component Paint Process

## Specifications

<b>Coupler:</b>	2 5/16" Ball Coupler 30,000 lb.	<b>Axle:</b>	(2) 12,000 lb. w/ Electric Brakes
<b>Safety Chains:</b>	26,400 lb. 3/8" x 35" w/Clevis Slip Hook	<b>Suspension:</b>	Multi-Leaf Spring w/ Equalizer
<b>Crossmember:</b>	S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers	<b>Tires:</b>	16 x 6; Steel 8 Bolt, dual wheels
<b>Lights:</b>	S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers	<b>Brakes:</b>	Electric
<b>Floor:</b>	2' x 8' Spruce Kiln Dried Dimensional Lumber	<b>Elec. Plug:</b>	Cold Weather 7 Wire RV Plug
<b>Jack:</b>	12,000 lb Sidewind		
<b>Frame:</b>	Engineered Built Up Main Beam Web: 90 Ksi High Strength Steel Flanges: 4" x 3/8" Steel Bar		
<b>Side Rails:</b>	5" x 2" HSS Tubing; 2" x 3/8" Rub Rail, Stake Pockets, and Chain Spools, 24" spacing		
<b>Neck:</b>	Engineered Built I Beam Web: 90 Ksi High Strength Steel Flanges: 4" x 3/8" Steel Bar		

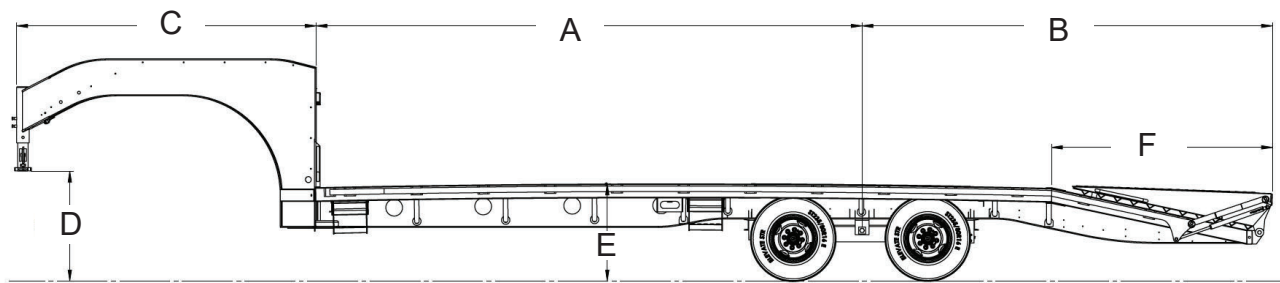

## Dimensions

Model	A	B	C	D	E	F
ETGT12-22 + 6	196"	147"	107 5/8"	31 - 39 1/4"	34 11/16"	79 3/8"
ETGT12-24 + 6	288"	230.125"	57.875"	105.3125"	41.4375"	70.3125"
ETGT12-26 + 6	312"	249"	63"	105.3125"	41.4375"	70.3125"
ETGT12-28 + 6	336"	266"	70"	105.3125"	41.4375"	70.3125"
ETGT12-30 + 6	360"	301.938"	58.062"	105.3125"	41.4375"	70.3125"
ETGT12-32 + 6	384"	319.25"	64.75"	105.3125"	41.4375"	70.3125"
ETGT12-34 + 6	408"	336.375"	71.625"	105.3125"	41.4375"	70.3125"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT12-22	22' 12,000 lbs. Tandem Axle Dual Black	7,451 lb.	30,000 lb.	22,549 lb.
ETGT12-24	24' 12,000 lbs. Tandem Axle Dual Black	6,413 lb.	29,059 lb.	22,646 lb.
ETGT12-26	26' 12,000 lbs. Tandem Axle Dual Black	6,602 lb.	29,059 lb.	22,457 lb.
ETGT12-28	28' 12,000 lbs. Tandem Axle Dual Black	6,862 lb.	29,059 lb.	22,197 lb.
ETGT12-30	30' 12,000 lbs. Tandem Axle Dual Black	7,043 lb.	29,059 lb.	22,016 lb.
ETGT12-32	32' 12,000 lbs. Tandem Axle Dual Black	7,277 lb.	29,059 lb.	21,782 lb.
ETGT12-34	34' 12,000 lbs. Tandem Axle Dual Black	7,480 lb.	29,059 lb.	21,579 lb.

## Standard Parts

**Part# 52611** – AXLE 12-SBSA-74-46-ADJSS-US-G-865-7244-18BULPT

**Part# 1332** – LIGHT CLEARANCE RED 0.6875" ROUND LED W/ GROMMET

**Part# 2305** – BOX JUNCTION 7 POLE STANDARD PLASTIC AUTO

**Part# 2440** – LIGHT LICENSE PLATE SURFACE MOUNT MINI CHROME - LED

**Part# 56440** – BREAKAWAY SYSTEM ENGAGER – NO LED

**Part# 65823** – LIGHT MID-TURN AMBER 6.5" X 2.25" REFLECTIVE OVAL LED

**Part# 63020** – COUPLER GOOSENECK 30000 lb. 2.3125" BALL ROUND STEM INNER & OUTER ASSY

**Part# 57637** – LIGHT STOP TURN TAIL RED 6.5" X 2.25" OVAL LED – 10 DIODE

**Part# 2259** – JACK SIDEWIND 12000 lb. WELD-ON 13.5" LIFT DROP LEG SPRING LOADED FRONT PULL PIN

**Part# 57657** – PLUG AND MOLDED 7 WIRE LEAD 9.0' LONG - COLD WEATHER HD

**Part# 1329** – LIGHT CLEARANCE AMBER 0.6875" ROUND LED W/ GROMMET

**Part# 61187** – TIRE ASSEMBLY 235/80R16 E 10 PLY 8 HOLE STEEL OEM DUAL



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price con irmation on all Products. - Revised August 2023