



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Cambered Radius Roof Bows
- Aluminum Extrusion Trim Top And Bottom
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- Fully Enclosed Wiring
- Led Exterior And Interior Lights
- One-Piece Aluminum Roof
- 4' Aluminum Barlocks
- Side Vent
- Zinc Coated Hardware

Specifications

Axle:	(2) 3,500 lb. Lippert Spring	Crossmembers:	Steel HSS 2.0" X 2.0"
Brakes:	Electric Self-Adjusting	Floor:	3/4" Plywood
Coupler:	10,000 lb Stamped	Walls:	3/8" Plywood
Jack:	2,000 lb Top-Wind	Wheels:	205/75R15 C Steel
Side Door:	36" x 78" with RV Latch	Electric Plug:	7 Wire RV
Floor D-Rings:	2,000 lb.	Ramp Rating:	2,500 lb.
Main Rails:	Steel HSS 4.0" X 2.0"		

Options

Rear Door	
Ramp	N/A

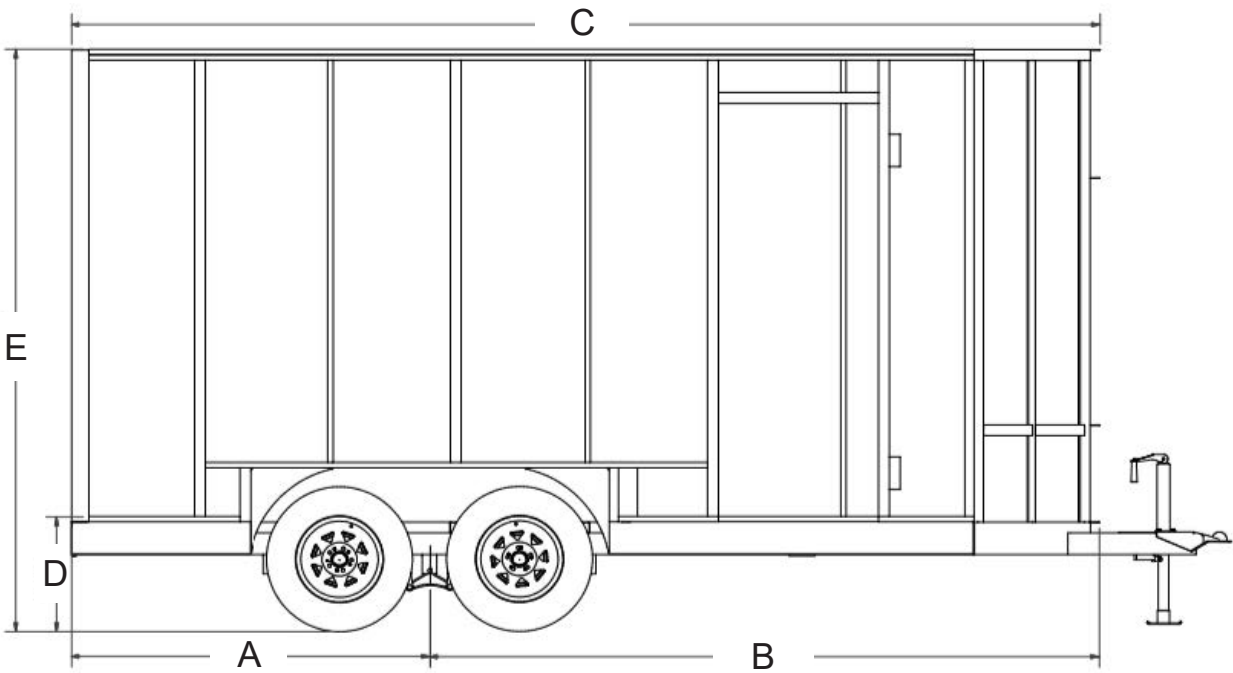

Dimensions

Model	A	B	C	D	E
LCHT35-7.516V-86	67"	125 5/8"	192 5/8"	21"	109 1/2"
LCHT35-7.518V-86	76"	140 5/8"	216 5/8"	21"	109 1/2"
LCHT35-7.520V-86	85"	155 5/8"	240 5/8"	21"	109 1/2"

Model	Rear Door Entrance	Space Between Fenders
LCHT35-7.516V-86	82 1/8"W X 80 7/16"H	81"
LCHT35-7.518V-86	82 1/8"W X 80 7/16"H	81"
LCHT35-7.520V-86	82 1/8"W X 80 7/16"H	81"

Model	Description	Net Weight	GVWR	Payload Cap.
LCHT35-7.516V-86	7.5' x 16' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2,239 lb.	7,700 lb.	5,461 lb.
LCHT35-7.518V-86	7.5' x 18' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2,525 lb.	7,700 lb.	5,175 lb.
LCHT35-7.520V-86	7.5' x 20' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2,776 lb.	7,700 lb.	4,924 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2025