



Standard Features


- HSS Structural Tubing Frame, Floor, Wall, Roof
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- One-piece aluminum roof
- Cambered radius roof bows
- Fully Enclosed Wiring
- 4 Foot aluminum barlocks
- Zinc coated Hardware
- Aluminum Extrusion Trim Top and Bottom
- Led Exterior and Interior Lights
- Side vent

Specifications

Axle:	(2) 3,500 lb Lippert Spring	Floor:	3/4" Plywood
Brakes:	Electric Self-Adjusting	Walls:	3/8" Plywood
Coupler:	10,000 lb Stamped	Wheels:	205/75R15 C Steel
Jack:	2,000 lb Top-Wind	Electric Plug:	7 Wire RV
Side Door:	30" x 78" with RV Latch	Ramp Rating:	2,500 lb
Floor D-Rings:	2,000 lb		

Options

Rear Door	
Ramp	N/A

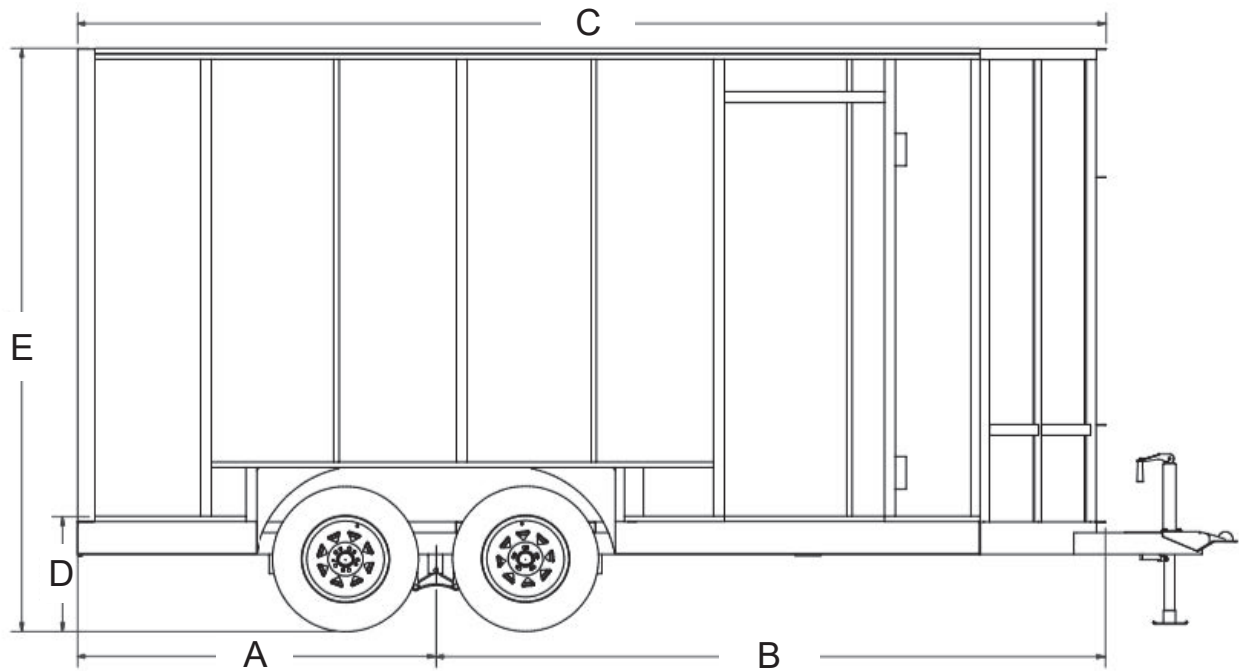

Dimensions

Model	A	B	C	D	E
LCHT35-7.516V-86	67"	125 5/8"	192 5/8"	21"	109 1/2"
LCHT35-7.518V-86	76"	140 5/8"	216 5/8"	21"	109 1/2"
LCHT35-7.520V-86	85"	155 5/8"	240 5/8"	21"	109 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
LCHT35-7.516V-86	7.5' x 16' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2239 lb	7700 lb	5461 lb
LCHT35-7.518V-86	7.5' x 18' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2525 lb	7700 lb	5175 lb
LCHT35-7.520V-86	7.5' x 20' x 86" wall height, 3,500 lb. Tandem Axle V Nose	2776 lb	7700 lb	4924 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2024