




### Standard Features

- Fully Enclosed Wiring w/LED Lights
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Spare tire and tool tray included
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

### Specifications

<b>Axle:</b>	(3) 7,000 lb. Lippert Spring	<b>Frame:</b>	8 X 2 HSS
<b>Suspension:</b>	Multi-Leaf Spring w/ Equalizer	<b>Ramp:</b>	7ft Aluminum Slide-In
<b>Wheels:</b>	235/80R16 E Steel	<b>Crossmember:</b>	3" I-Beam 80 KSI
<b>Brakes:</b>	Electric Self-Adjusting	<b>Tongue:</b>	8 X 2 HSS
<b>Jack:</b>	12,000 lb. Side-Wind Bolted	<b>Deck:</b>	HD Fir Plank
<b>Coupler:</b>	21,000 lb. Demco Adjustable	<b>Electric Plug:</b>	7 Wire RV

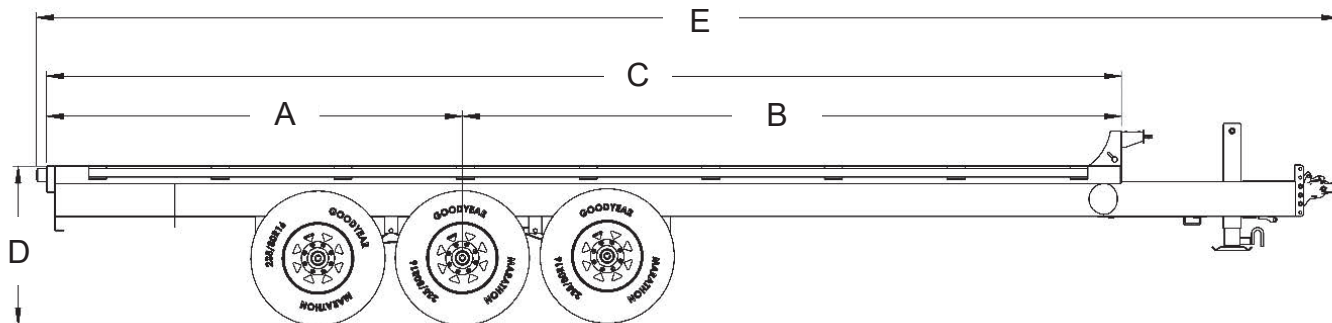

## Dimensions

Model	A	B	C	D	E
HBATR7-25	95 13/16"	205 15/16"	301 3/4"	31 5/8"	377 5/8"

Deck Width
97"

Model	Description	Net Weight	GVWR	Payload Cap.
HBATR7-25	25' 7,000 lb. Triple Axle Black	3,940 lb.	20,955 lb.	17,015 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised May 2024