



Gooseneck Equipment Trailer 12K Tridem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(3) 12,000 lb.
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		

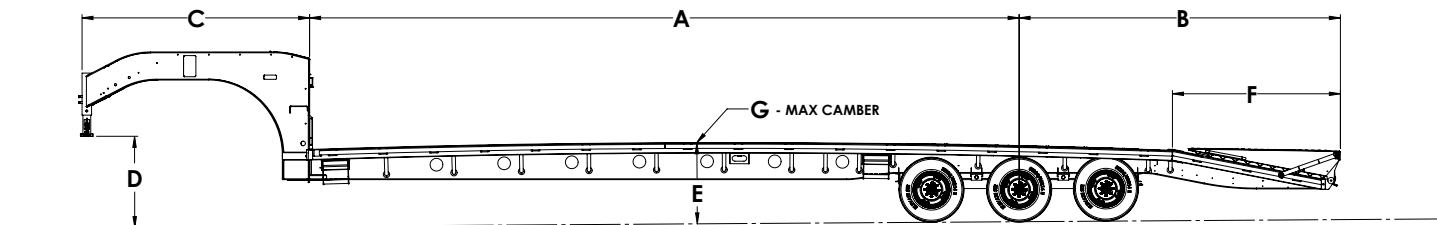

Dimensions

Model	A	B	C	D	E	F	G
ETGTR12-22 BT	192.375"	151.25"	107.625"	40.625"	35.25"	79.125"	1.3125"
ETGTR12-24 BT	216.375"	151.25"	107.625"	40.625"	35.5"	79.125"	1.625"
ETGTR12-26 BT	240.375"	151.25"	107.625"	40.625"	35.75"	79.125"	1.875"
ETGTR12-28 BT	264.375"	151.25"	107.625"	40.625"	36"	79.125"	2.1875"
ETGTR12-30 BT	288.375"	151.25"	107.625"	40.625"	36.5"	79.125"	2.5625"
ETGTR12-32 BT	312.375"	151.25"	107.625"	40.625"	37"	79.125"	2.875"
ETGTR12-34 BT	336.375"	151.25"	107.625"	40.625"	37.5"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR12-22 BT	22' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,135 lb.	30,000 lb.	21,865 lb.
ETGTR12-24 BT	24' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,500 lb.	30,000 lb.	21,500 lb.
ETGTR12-26 BT	26' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,680 lb.	30,000 lb.	21,320 lb.
ETGTR12-28 BT	28' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,043 lb.	30,000 lb.	20,957 lb.
ETGTR12-30 BT	30' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,145 lb.	30,000 lb.	20,855 lb.
ETGTR12-32 BT	32' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,405 lb.	30,000 lb.	20,595 lb.
ETGTR12-34 BT	34' 12,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,605 lb.	30,000 lb.	20,395 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGTR12-22 BT	8,260 lb.	40,000 lb.	31,740 lb.
ETGTR12-24 BT	8,625 lb.	40,000 lb.	31,375 lb.
ETGTR12-26 BT	8,805 lb.	40,000 lb.	31,195 lb.
ETGTR12-28 BT	9,168 lb.	40,000 lb.	30,832 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGTR12-30 BT	9,270 lb.	40,000 lb.	30,730 lb.
ETGTR12-32 BT	9,530 lb.	40,000 lb.	30,470 lb.
ETGTR12-34 BT	9,730 lb.	40,000 lb.	30,270 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026