



SL612-10K

6' x 12', 10,000 lb.

Tandem Axle Dump Trailer




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- Shorter A-Frame – Reducing Length by ~8”
- Stake Pockets
- Scissor hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Redesigned Rear Step
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8” Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 5,200 lb. Lippert Spring	Floor & Wall:	12ga Floor / 14ga Wall
Hoist:	Scissor Hoist 4” Bore X 12” Stroke 5 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) 2,500 lb. Midspan Ramps (54 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	225/75R15 D Steel	Safety Chains:	16,200 lb 5/16”
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°

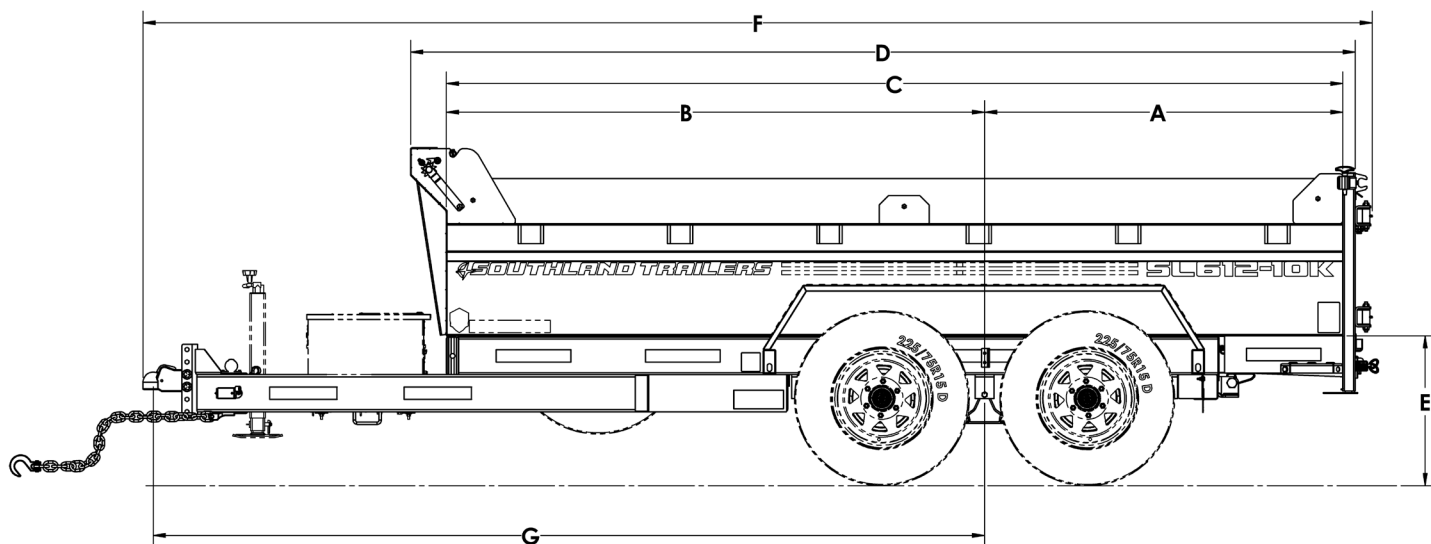

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL612-10K	59 1/4"	86 1/4"	145 1/2"	151 1/4"	24"	203 1/2"	141 1/8"	74"

Model	Description	Net Weight	GVWR	Payload Cap.
SL612-10K	6' x 12' 10,000 lb. Tandem Axle Black/Charcoal	2,734 lb.	11,440 lb.	8,706 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL612-14K

6' x 12', 14,000 lb.
Tandem Axle Dump Trailer




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- Shorter A-Frame – Reducing Length by ~8"
- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Redesigned Rear Step
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	Floor & Wall:	12ga Floor / 14ga Wall
Hoist:	Scissor Hoist 4" Bore X 12" Stroke 5 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Safety Chains:	16,200 lb 5/16"
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°

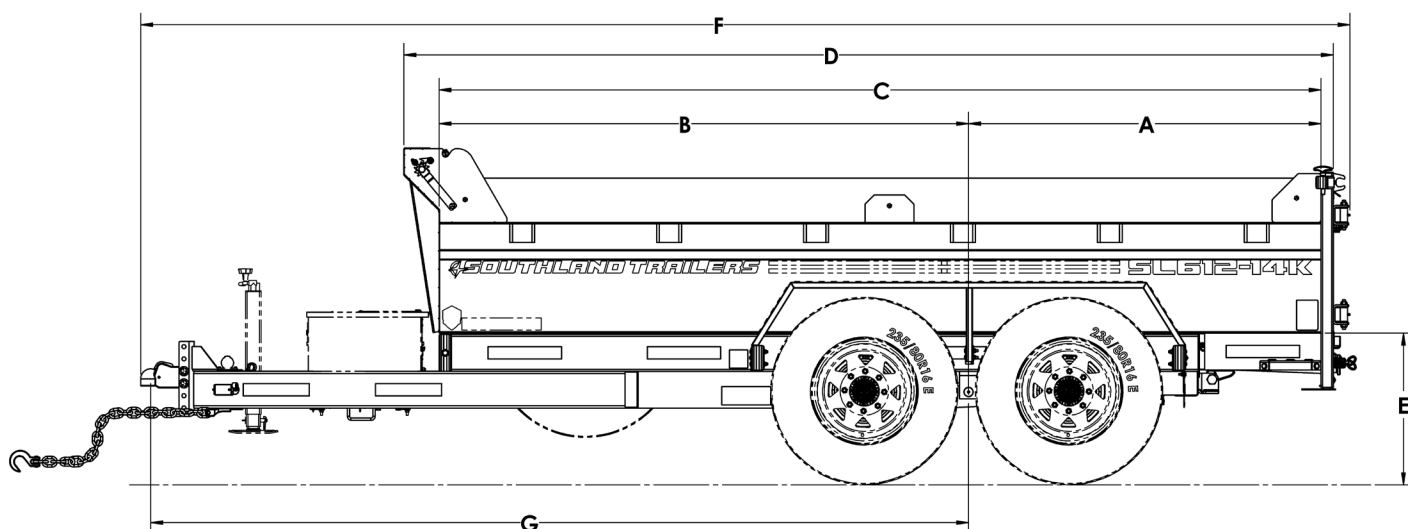

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL612-14K	57 9/16"	86 1/2"	144 1/16"	151 4/5"	24 3/4"	197 9/16"	133 5/8"	74"

Model	Description	Net Weight	GVWR	Payload Cap.
SL612-14K	6' x 12' 14,000 lb. Tandem Axle Black/Charcoal	2,932 lb.	15,400 lb.	12,468 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL612-14KHS

6' x 12', 14,000 lb.
Tandem Axle Dump Trailer




Standard Features

- Removable Bolt-On Fenders
- Over Center Spreader Latch
- Spring Latch Gate Holdbacks
- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- Rear Step
- HSS Structural Tubing
- Engineered Sill Design
- *Spare Tire
- *Galvanized Steel Slide in Ramps
- *Roll Up Tarp
- *Rear Drop Down Stabilizer Jacks
- *6" Side Boards

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Floor & Wall:	12ga Floor/Side Wall 14ga Front Wall
Hoist:	Scissor Hoist 5" Bore X 12" Stroke 7 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Safety Chains:	16,200 lb 5/16"
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	45°

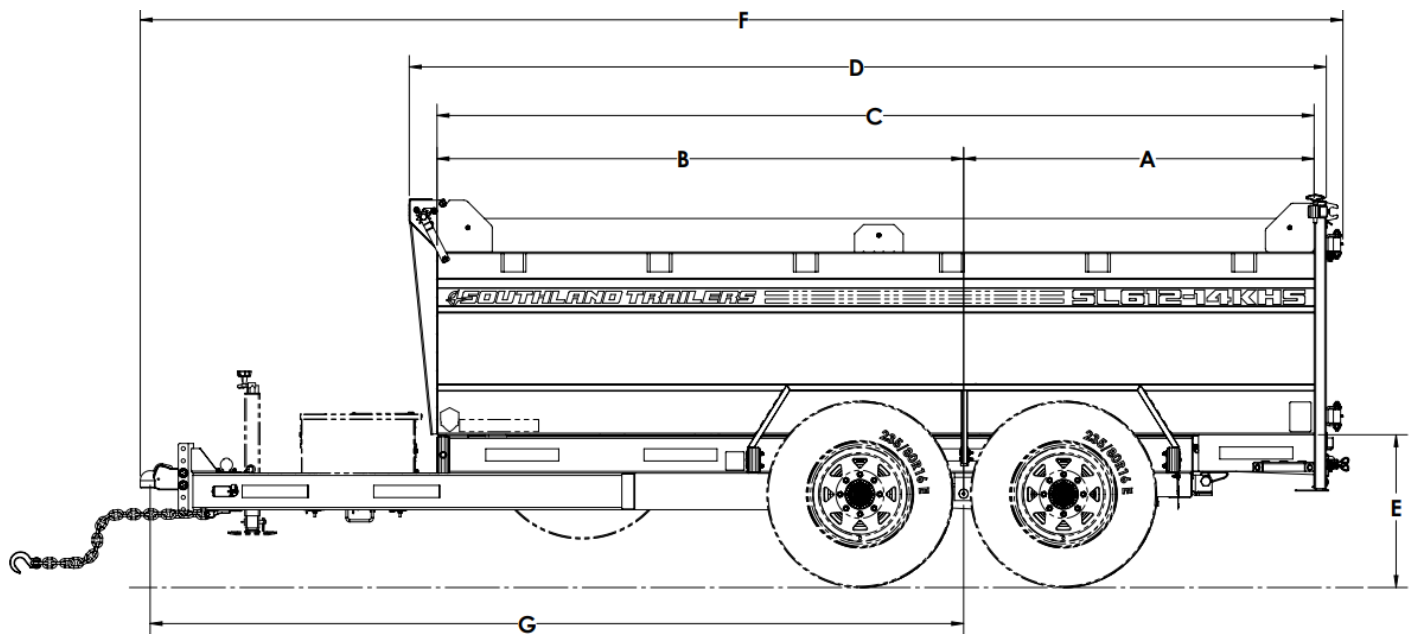

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL612-14KHS	50 1/16"	69 15/16"	120"	126 5/16"	21 1/2"	173 9/16"	117 1/8"	62"

Model	Description	Net Weight	GVWR	Payload Cap.
SL612-14KHS	6' x 12' 14,000 lb. Tandem Axle Highside Black/Charcoal	3,160 lbs	15,400 lb.	12,240 lbs



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026