SL612-10K
6’ x 12’, 10,000 lb.
Tandem Axle Dump Trailer

Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- Shorter A-Frame – Reducing Length by ~8”
- Stake Pockets
- Scissor hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Redesigned Rear Step
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8” Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 5,200 lb. Lippert Spring	**Floor & Wall:**	12ga Floor / 14ga Wall
Hoist:	Champion CS412T 7 Ton	**Frame:**	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	**Lights:**	LED
Ramp:	(2) 2,500 lb. Midspan Ramps (54 lbs. each)	**Electric Plug:**	Cold Weather 7 Wire RV
Wheels:	225/75R15 D Steel	**Safety Chains:**	16,200 lb 5/16”
Tailgate:	Steel Barn Door w/ Over Centre Latch	**Paint Specs:**	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	**Dump Angle:**	45°

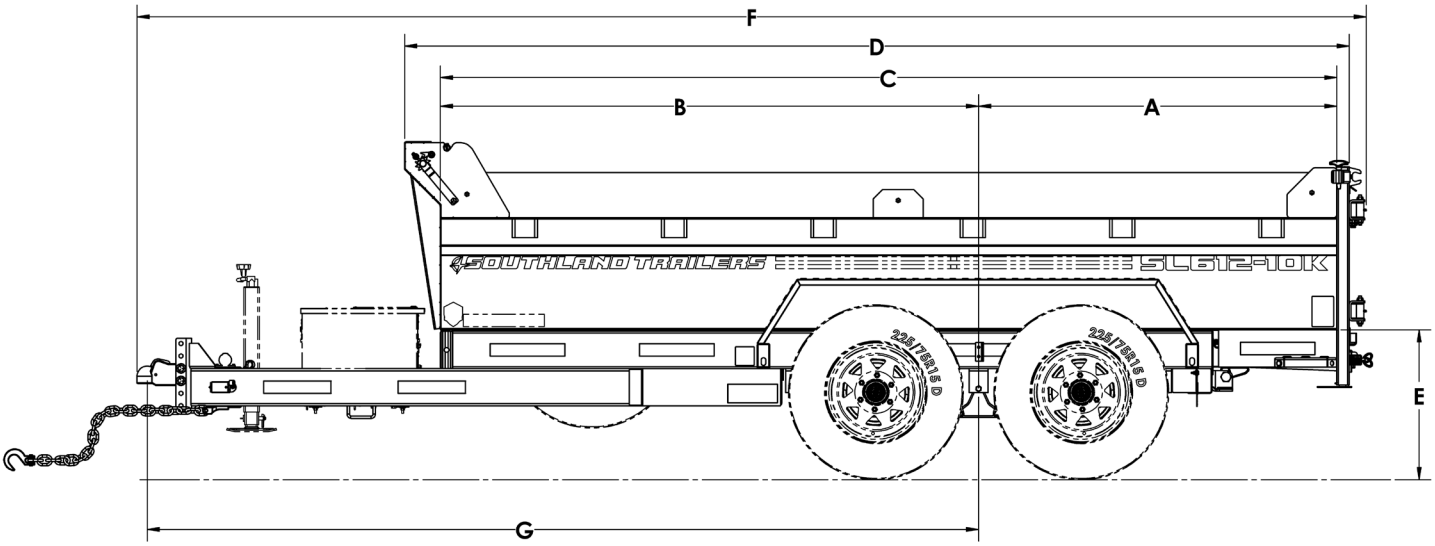

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL612-10K	59 1/4”	86 1/4”	145 1/2”	151 1/4”	24”	203 1/2”	141 1/8”	74”

Model	Description	Net Weight	GVWR	Payload Cap.
SL612-10K	6’ x 12’ 10,000 lb. Tandem Axle Black/Charcoal	2,715 lb.	11,440 lb.	8,725 lb.

THE CANADIAN WELDING BUREAU

SOUTHLAND TRAILERS

Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026

SL612-14K
6’ x 12’, 14,000 lb.
Tandem Axle Dump Trailer

Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- Shorter A-Frame – Reducing Length by ~8”
- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Redesigned Rear Step
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8” Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	**Floor & Wall:**	12ga Floor / 14ga Wall
Hoist:	Scissor Hoist 4” Bore X 12” Stroke 5 Ton	**Frame:**	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	**Lights:**	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	**Electric Plug:**	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	**Safety Chains:**	16,200 lb 5/16”
Tailgate:	Steel Barn Door w/ Over Centre Latch	**Paint Specs:**	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	**Dump Angle:**	45°

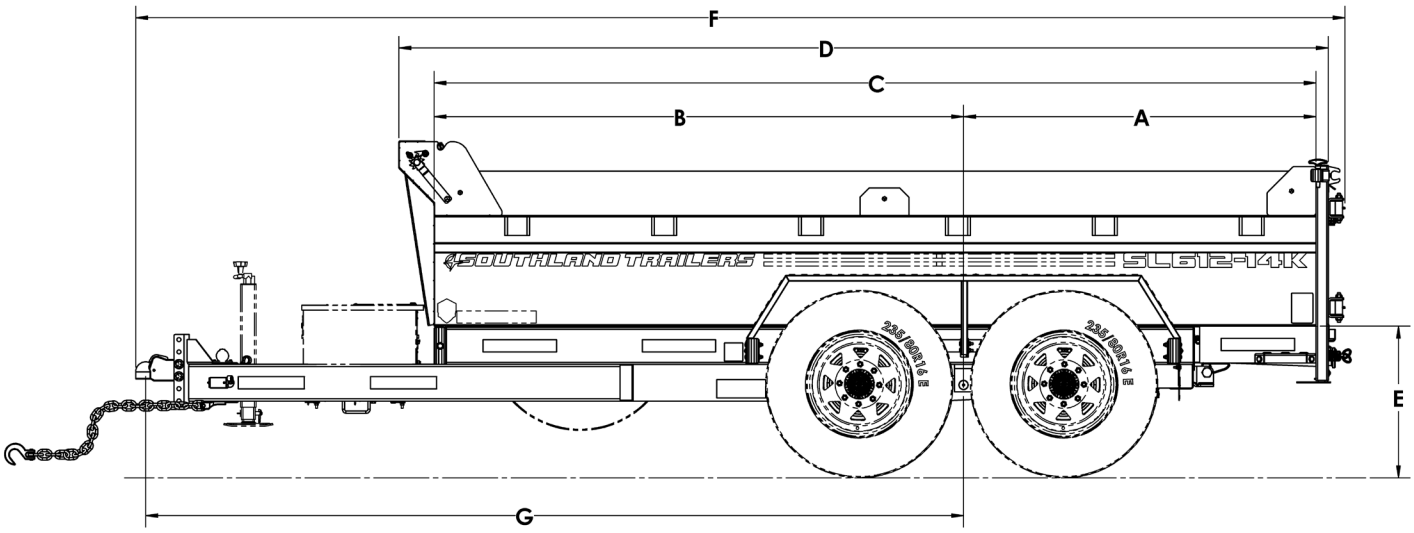

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL612-14K	57 9/16”	86 1/2”	144 1/16”	151 4/5”	24 3/4”	197 9/16”	133 5/8”	74”

Model	Description	Net Weight	GVWR	Payload Cap.
SL612-14K	6’ x 12’ 14,000 lb. Tandem Axle Black/Charcoal	2,932 lb.	15,400 lb.	12,468 lb.

THE CANADIAN WELDING BUREAU

SOUTHLAND TRAILERS

Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026