



SL716-14K

7' x 16', 14,000 lb.

Heavy Duty Tandem Axle Dump Trailer




Standard Features

- Over Center Spreader Latch
- Spring Latch Gate Holdbacks
- 6" Scissor Hoist – Power Up / Power Down
- Corner Located D-Rings
- Stake Pockets
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- Rear Step
- HSS Structural Tubing
- Engineered Sill Design

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Floor & Wall:	10ga Floor / 12ga Wall
Hoist:	Scissor Hoist 6" Bore X 20" Stroke 14 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) Galvanized Steel 4,000 lb Midspan Ramps (65 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	50°

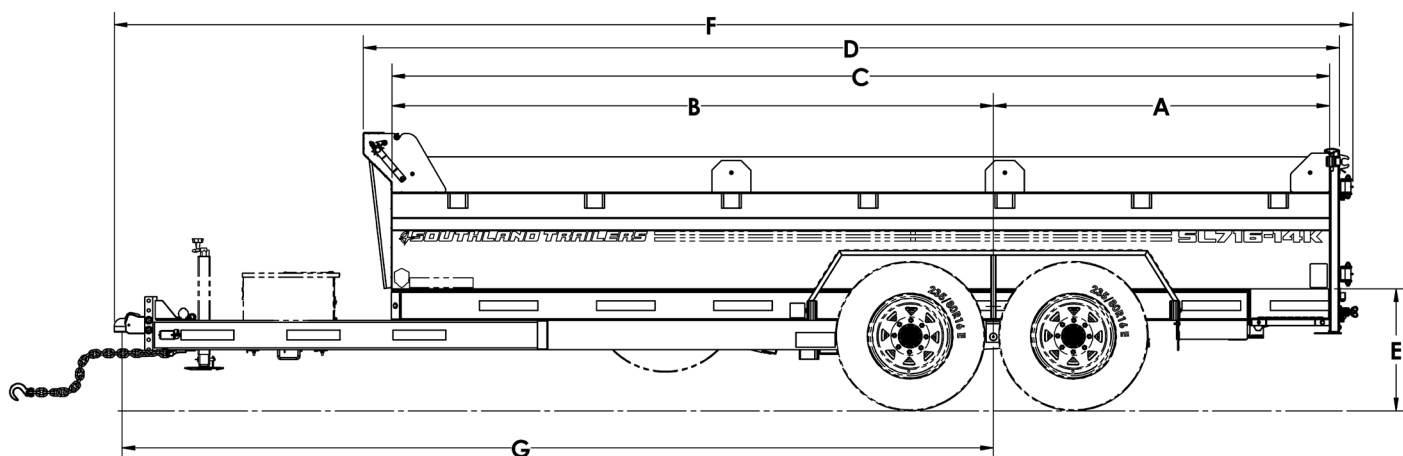

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL716-14K	68 7/8"	123 1/8"	192"	199 7/8"	25"	253 9/16"	178 3/8"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL716-14K	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,037 lbs	15,400 lbs	11,380 lbs



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised August 2026