



SL716-16K

7' x 16', 16,000 lb.

Tandem Axle Dump Trailer




Standard Features

- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- HD Welded Front Step
- Spare Tire*
- Aluminum Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb Lippert Multi-Leaf Spring w/Equalizer	Floor & Wall:	10ga Floor / 10ga Wall
Hoist:	Scissor Hoist 6" Bore X 20" Stroke 14 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance
Ramp:	(2) Aluminum 4,500 lb Midspan Ramps (34 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV Plug
Wheels:	235/85R16 F Steel	Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook
Tailgate:	Steel 3-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	50°
Brakes:	Electric		

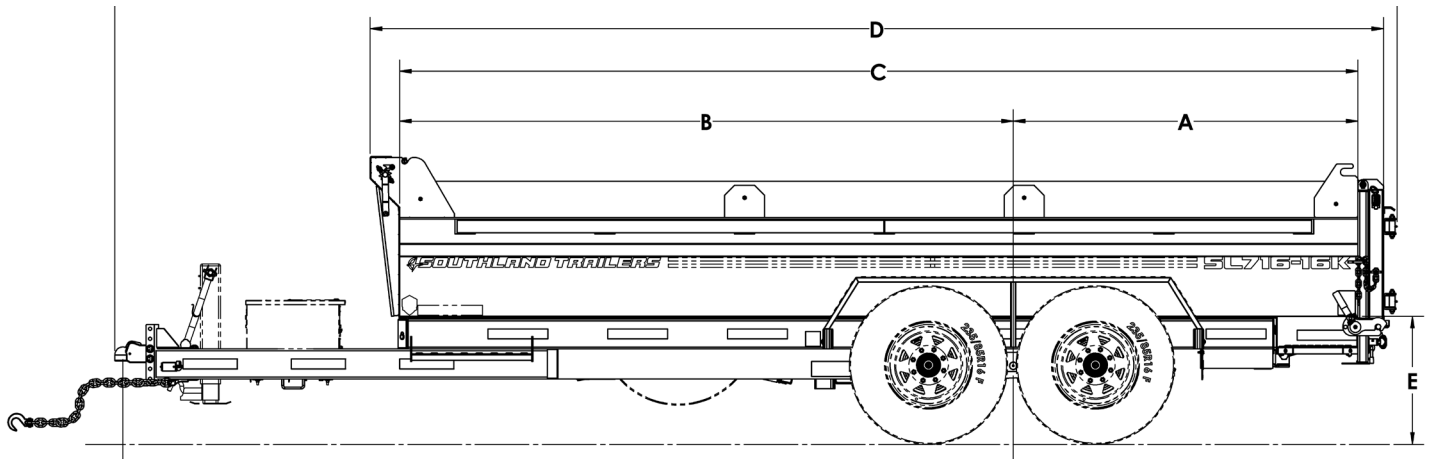

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL716-16K	69"	123"	192"	203"	25 5/8"	256 7/8"	178 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL716-16K	7' x 16' 16,000 lb. Tandem Axle Black/Charcoal	4,563 lb.	17,420 lb.	12,857 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026