



XRCHT60 V-Nose 7' W x 16' - 18' L – 86" Wall Height Enclosed Cargo Trailer



Standard Features


- Radius Top Rv Door
- Aluminum Wheels
- Screwed Interior 3/8" Plywood Wall
- Torsion Axles
- One-Piece Aluminum Roof
- Mezzanine Nudo Poly 3/4" Flooring
- Four Flush Mount Floor Tie-Downs
- Fully Enclosed Wiring
- HSS Structural Tubing Frame, Floor, Wall, Roof
- Screwless VHB Bonded Painted Aluminum Exterior Panels
- 4' Aluminum Barlocks
- Cableless Ramp Door - Spring Assist (not applicable to barn)

Specifications

Axle:	(2) 6,000 lb. Lippert Torsion	Corssmembers:	Steel HSS 2.0" X 2.0"
Brakes:	Electric Self-Adjusting	Floor:	3/4" Nudo Poly Floor
Coupler:	14,000 lb. Stamped	Walls:	3/8" Plywood
Jack:	2,000 lb. Top-Wind Bolted	Wheels:	235/80R16 E Aluminum
Side Door:	36" x 78" with RV Latch	Electric Plug:	7 Wire Plug
Floor D-Rings:	6,000 lb.	Ramp Rating:	2,500 lb. Midspan
Main Rails:	Steel HSS 4.0" X 2.0"		

Options

Rear Door	
Ramp	Barn

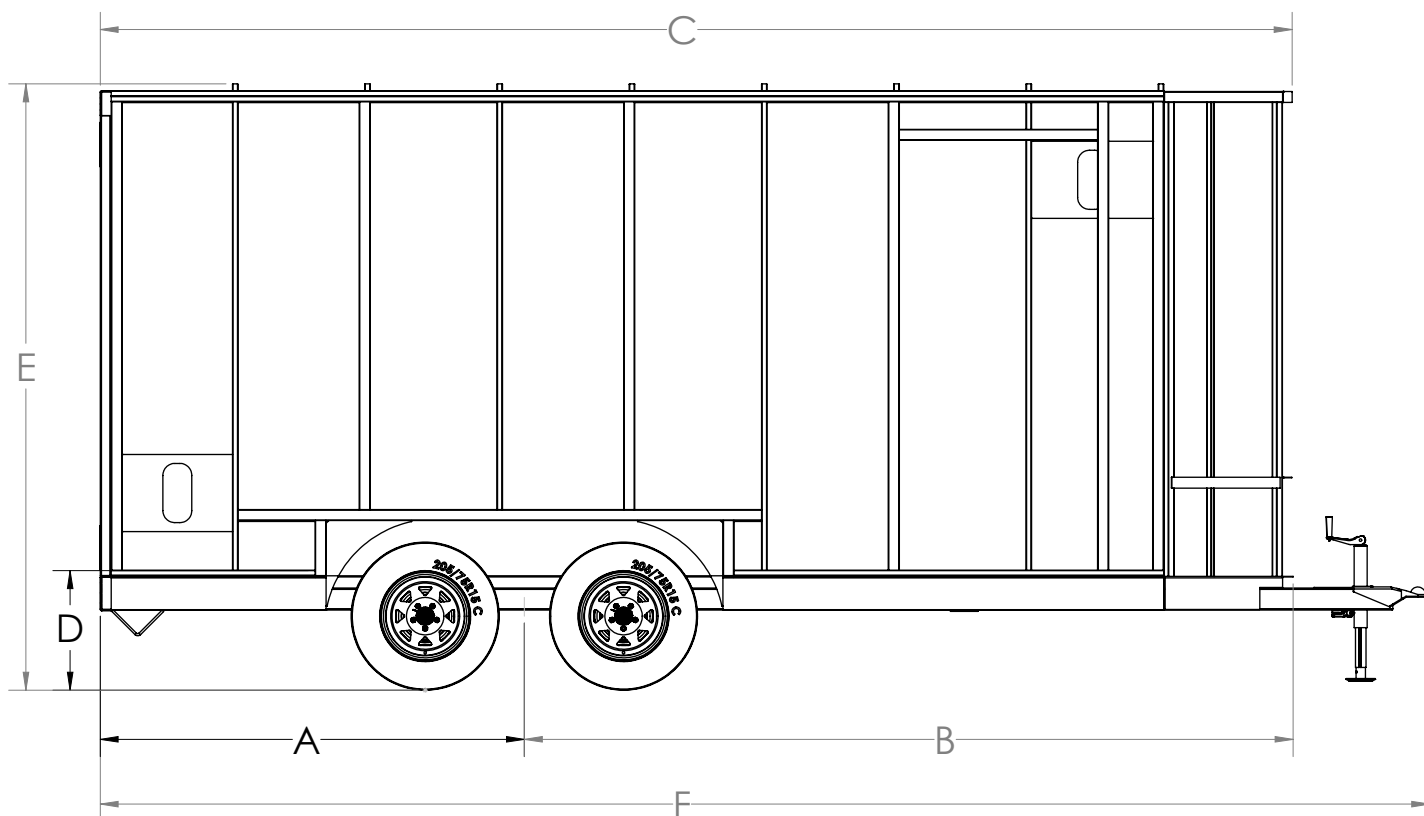

Dimensions

Model	A	B	C	D	E	F
XRCHT60-716V-86	77"	115"	192"	23 11/16"	112"	217"
XRCHT60-718V-86	77"	139"	216"	23 11/16"	112"	241"

Rear Door Entrance

76 1/8"W x 82.75"H

Model	Description	Net Weight	GVWR	Payload Cap.
XRCHT60-716V-86	7' x 16' x 86" wall height, 6,000 lb. Tandem Axle V Nose	2592 lb.	13,200 lb.	10,608 lb.
XRCHT60-718V-86	7' x 18' x 86" wall height, 6,000 lb. Tandem Axle V Nose	2702 lb.	13,200 lb.	10,498 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised August 2025