



SL714-14K

7' x 14', 14,000 lb.

Tandem Axle Dump Trailer




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- NEW 6" Scissor Hoist – Power Up / Power Down
- NEW Corner Located D-Rings
- Upgraded 2" Thick Rear Door Panels
- Stake Pockets
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	Floor & Wall:	10ga Floor / 12ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Brakes:	Electric
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

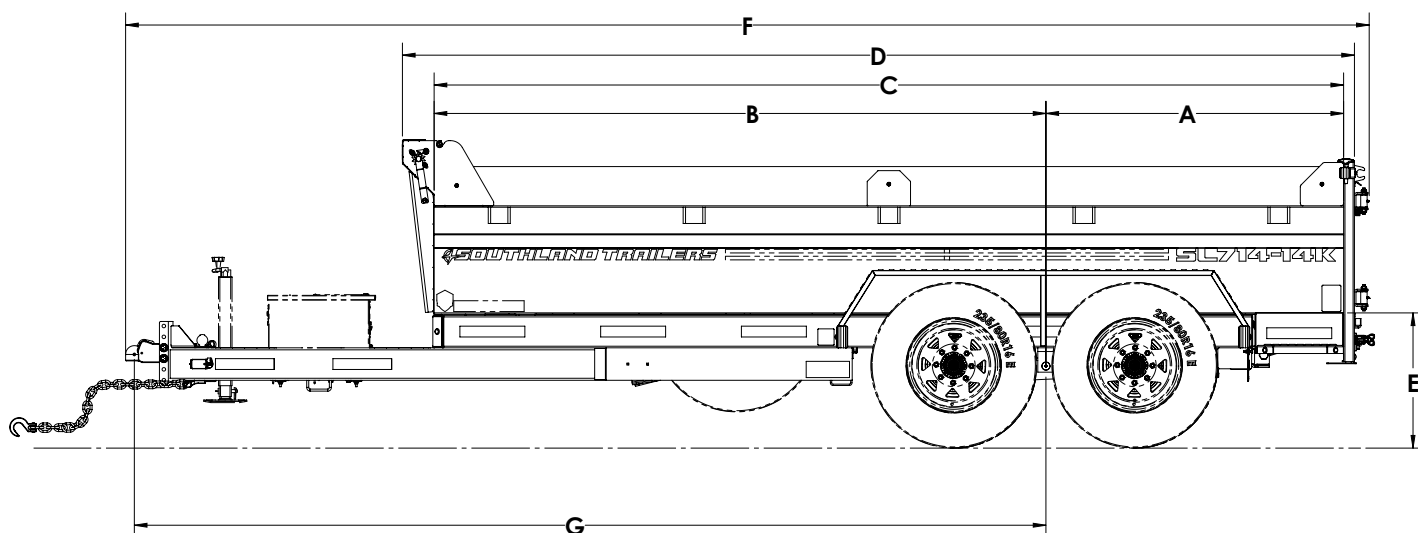

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-14K	55"	113"	168"	175 7/8"	25"	229 11/16"	168 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-14K	7' x 14' 14,000 lb. Tandem Axle Black/Charcoal	3,615 lb.	15,400 lb.	11,785 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026