

## 12K Tandem Dual Gooseneck


<b>G.V.W.R</b>	29,000#	<b>AXLE</b>	(2) 12000# w/ Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	12,000#	<b>SUSPENSION</b>	Multi-Leaf Spring w/ Equalizer
<b>COUPLER</b>	2 5/16" Ball Coupler 30,000#	<b>TIRE</b>	ST235/80R16 E 10 Ply
<b>SAFETY CHAINS</b>	25,000# 3/8" X 35" w/ Clevis Slip Hook	<b>WHEEL</b>	16 x 6; Steel 8 Bolt, Dual Wheels
<b>JACK</b>	12,000# Bolt-On 13.5" Lift Drop Leg Spring Loaded front Pull Pin	<b>FLOOR</b>	2x8 Spruce Kiln Dried Dimensional Lumber
<b>NECK</b>	Engineered Built I Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar	<b>LIGHTS</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>FRAME</b>	Engineered Built Up Main Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar	<b>ELEC. PLUG</b>	Cold Weather 7 Wire RV Plug
<b>CROSSMEMBERS</b>	S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers	<b>FINISH (PREP)</b>	Steel is cleaned with steel shot blast system to ensure a professional finish.
<b>SIDE RAIL</b>	5" x 2" HSS Tubing 2" x 0.375" rub rail, Stake pockets and chain spools, 24" spacing	<b>FINISH</b>	Superior PPG Paint with a Two Way Hardener is Applied for a Highly Decorative and Protective Finish.

## STANDARD FEATURES

- 97.25" Foot Working Deck
- 102" Overall Width
- Stake Pockets, Rub Rails, & Chain Tabs
- Plank Deck
- Spring Assist Steel Full Width Max Ramps
- Low Profile Bed, Pierced-Beam Frame
- 25,000 #Bolt-on Safety Chains & Hooks
- High Tensile Super Lite Beam Crossmembers
- Deck 12,000# Bolt-On 13.5" Lift Drop Leg Spring Loaded Front Pin
- Dual Wheels
- Breakaway Kit
- Protected Wiring
- LED Lighting Package
- Lockable Front Toolbox
- Lippert Brand Axles
- Radial Tires
- Engineered One Piece Continuous Weld Gooseneck
- Engineered Robotically Welded Continuous Main Beam
- 3/4" Precambered Deck

## DESCRIPTION

Dimensions			
Length	A	B	C
24' + 6'	288"	233.563"	54.437"
26' + 6'	312"	250"	62"
28' + 6'	336"	265.375"	70.625"
30' + 6'	360"	302.625"	57.375"
32' + 6'	384"	320.281"	63.719"
34' + 6'	408"	336.75"	71.25"

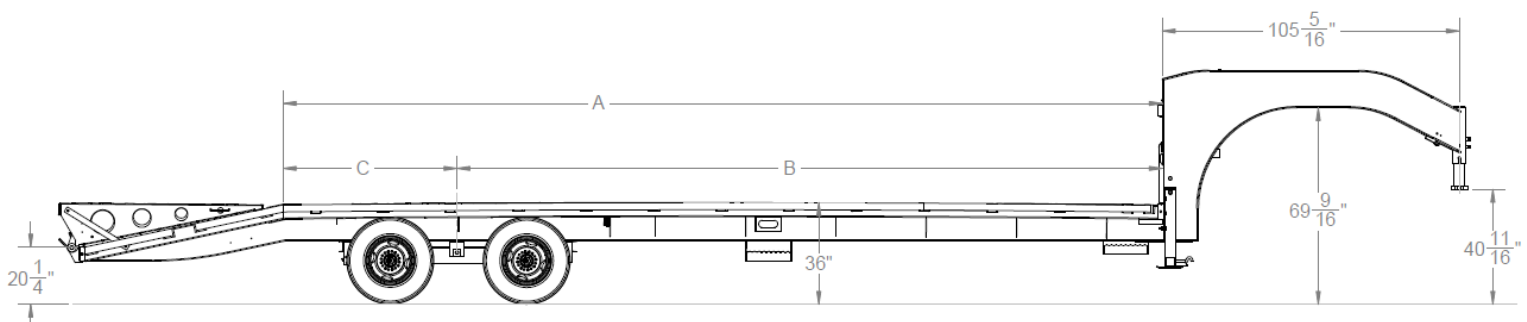



#### Standard Parts

Part# 52611 – AXLE 12-SBSA-74-46-ADJSS-US-G-865-7244-18BULPT	Part#1332 – LIGHT CLEARANCE RED 0.6875" ROUND LED W/ GROMMET
Part# 2305 – BOX JUNCTION 7 POLE STANDARD PLASTIC AUTO	Part# 2440 – LIGHT LICENSE PLATE SURFACE MOUNT MINI CHROME - LED
Part# 56440 – BREAKAWAY SYSTEM ENGAGER – NO LED	Part#65823 – LIGHT MID-TURN AMBER 6.5" X 2.25" REFLECTIVE OVAL LED
Part# 63020 – COUPLER GOOSENECK 30000# 2.3125" BALL ROUND STEM INNER & OUTER ASS'Y	Part#57637 – LIGHT STOP TURN TAIL RED 6.5" X 2.25" OVAL LED – 10 DIODE
Part# 2259 – JACK SIDEWIND 12000# WELD-ON 13.5" LIFT DROP LEG SPRING LOADED FRONT PULL PIN	Part# 57657 – PLUG AND MOLDED 7 WIRE LEAD 9.0' LONG - COLD WEATHER HD



Part# 1329 – LIGHT CLEARANCE AMBER 0.6875" ROUND LED W/  
GROMMET

Part# 61187 – TIRE ASSEMBLY 235/80R16 E 10 PLY 8 HOLE STEEL OEM  
DUAL

Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Royal Cargo Products.  
Revised February 2020

