




Standard Features

- Fully Enclosed Wiring w/LED Lights
- 102" Wide Deck width
- Available in straight deck or beavertail
- Available with slide in or fold up ramps
- Spare tire and tool tray included
- High tensile steel I-beam crossmembers
- HSS Structural Tubing Frame
- HD Fir Decking
- Bolted Drop Leg Jacks
- Stake pockets and rub rail

Specifications

Axle:	(2) 7,000 lb Lippert Spring	Frame:	8 X 2 HSS
Suspension:	Multi-Leaf Spring w/ Equalizer	Crossmember:	3" I-Beam 80 KSI
Wheels:	235/80R16 E Steel	Tongue:	8 X 2 HSS
Brakes:	Electric Self-Adjusting	Deck:	HD Fir Plank
Jack:	12,000 lb Side-Wind Bolted	Electric Plug:	7 Wire Plug
Coupler:	21,000 lb Demco Adjustable	Ramp:	7ft. Aluminum Slide-in, 4,000 lb.

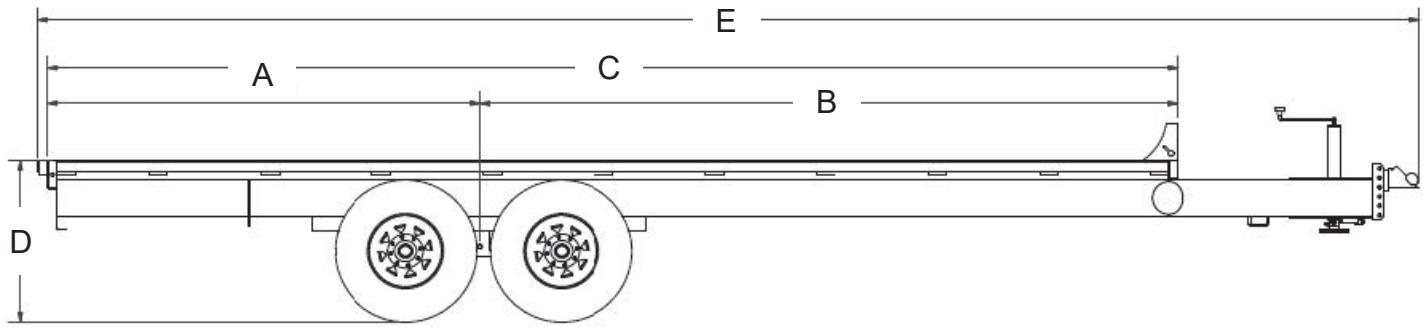

Dimensions

Model	A	B	C	D	E
HBAT7-14	N/A	N/A	N/A	N/A	N/A
HBAT7-16	72 3/16"	121 9/16"	193 3/4"	31 5/8"	269 5/8"
HBAT7-18	96 3/16"	121 9/16"	217 3/4"	31 5/8"	293 5/8"
HBAT7-20	96 3/16"	145 9/16"	241 3/4"	31 5/8"	317 5/8"
HBAT7-22	96 3/16"	169 9/16"	265 3/4"	31 5/8"	341 5/8"
HBAT7-24	108 3/16"	181 9/16"	289 3/4"	31 5/8"	365 5/8"

Model	Description	Net Weight	GVWR	Payload Cap.
HBAT7-14	14' 7000 lb. Tandem Axle Black	2409 lb	15,400 lb	12,991 lb
HBAT7-16	16' 7000 lb. Tandem Axle Black	2618 lb	15,400 lb	12,782 lb
HBAT7-18	18' 7000 lb. Tandem Axle Black	2829 lb	15,400 lb	12,571 lb
HBAT7-20	20' 7000 lb. Tandem Axle Black	3038 lb	15,400 lb	12,362 lb
HBAT7-22	22' 7000 lb. Tandem Axle Black	3249 lb	15,400 lb	12,151 lb
HBAT7-24	24' 7000 lb. Tandem Axle Black	3359 lb	15,400 lb	12,041 lb



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised January 2024