

SL714-16KHD 7' x 14', 16,000 lb. Heavy Duty Tandem Axle Dump Trailer




Standard Features

- Stake Pockets and Rub Rails
- • HD Front/Rear Side Steps
- • 8K Slipper Spring Axles
- • 3-Way Gate
- • Scissor Hoist – Power Up / Power Down
- • Adjustable Coupler
- • Aluminum Toolbox
- • 110V Battery Charger
- • 10W Solar Panel
- • PPG DTM 2 Part Epoxy Paint
- • Fully Enclosed Wiring
- • HSS Structural Tubing
- • Engineered Sill Design
- • Spare Tire*
- • Aluminum Slide in Ramps*
- • Roll Up Tarp*
- • Rear Drop Down Stabilizer Jacks*
- • Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb. Lippert Spring	Floor & Wall:	3/16" Floor / 10ga Wall
Hoist:	Champion CS615T 9 Ton	Frame:	6 X 2 HSS
Jack:	8,000 lb. Hydraulic Bolted	Lights:	LED
Ramp:	(2) 4,500 lb. Midspan Ramps (33 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 G Steel	Safety Chains:	16,200 lb 5/16"
Tailgate:	Steel 3-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°

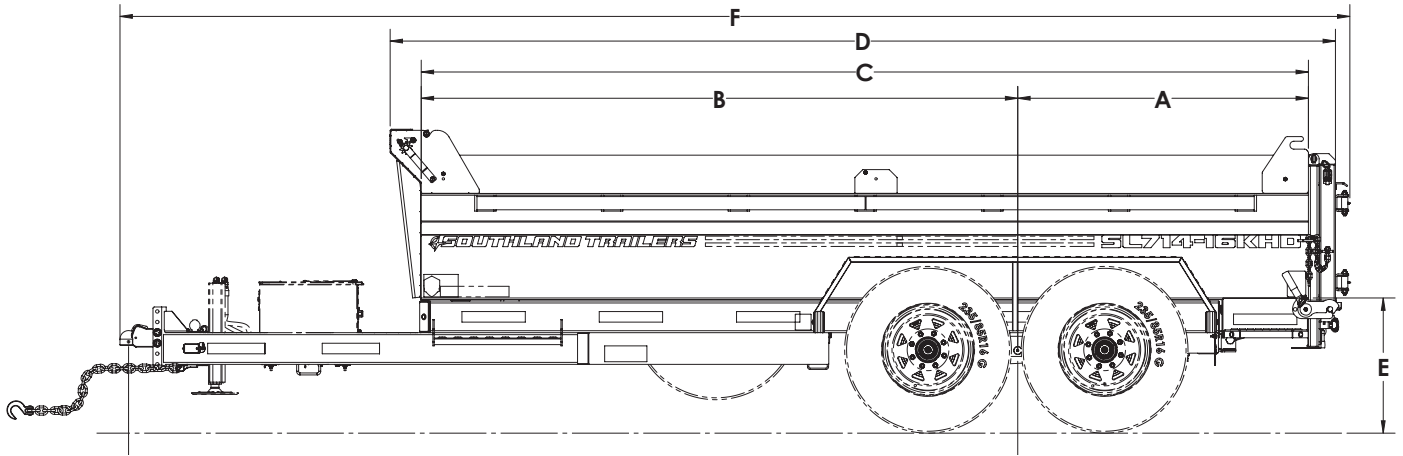

Dimensions

Model	A	B	C	D	E	Box Width
SL714-16KHD	60 1/4"	112 3/4"	173 1/4"	232 3/4"	25"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16KHD	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,336 lb.	17,420 lb.	13,084 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised March 2026