

SL714-16KHD 7' x 14', 16,000 lb. Heavy Duty Tandem Axle Dump Trailer




Standard Features

- Stake Pockets and Rub Rails
- HD Front/Rear Side Steps
- 8K Slipper Spring Axles
- 3-Way Gate
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Aluminum Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb. Lippert Spring	Floor & Wall:	3/16 Floor / 10ga Wall
Hoist:	Champion CS615T 9 Ton	Frame:	6 X 2 HSS
Jack:	8,000 lb. Hydraulic Bolted	Lights:	LED
Ramp:	(2) 4,500 lb. Midspan Aluminum Ramps (33 lb. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 G Steel	Safety Chains:	16,200 lb 5/16"
Tailgate:	Steel 3-Way Barn/Spreaders	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°

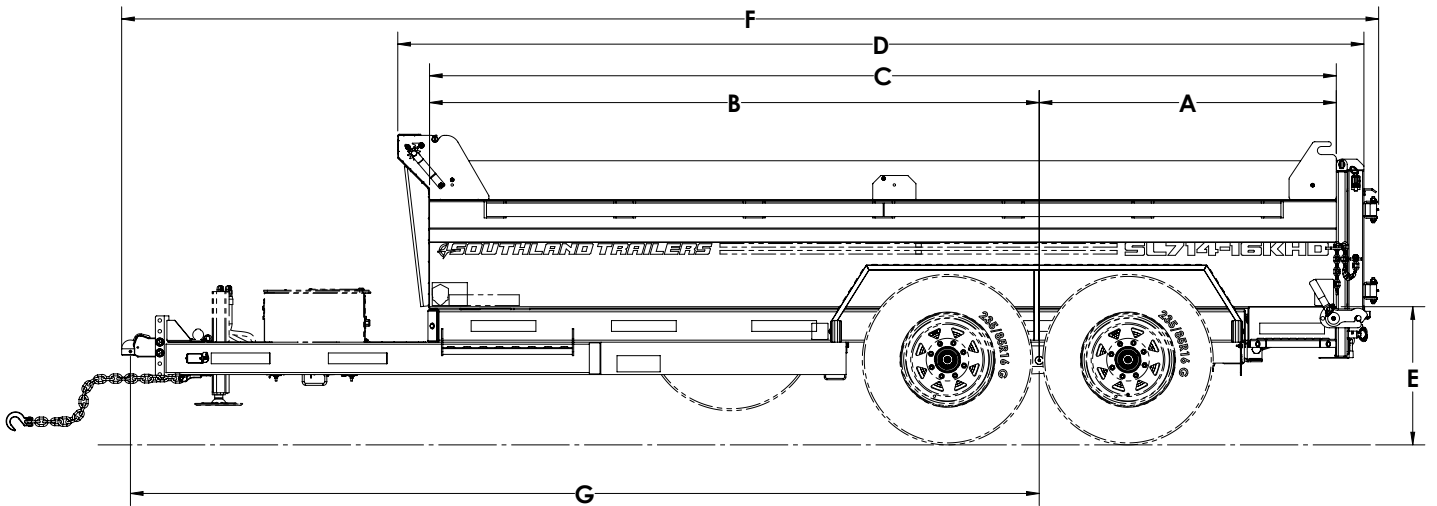

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-16KHD	55 1/16"	112 15/16"	168"	179"	25 5/8"	232 7/8"	168 3/8"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16KHD	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,229 lb.	17,600 lb.	13,371 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised June 2026