



SOUTHLAND
TRAILER CORP.

ETGTR10-24 Beavertail 10K Triple Dual Gooseneck 6' HD Ramps




Standard Features

- 97.25" Working Deck
- 102" Overall Width
- Stake Pockets, Rub Rails, & Chain Tabs
- Plank Deck
- Spring Assist Steel Full Width Max Ramps
- Low Profile Bed, Pierced-Beam Frame
- 25,000 #Bolt-on Safety Chains & Hooks
- Super Light 80 KSI Beam Crossmembers
- (2) 12,000# Bolt-on Drop Leg Jacks
- (2) 2" x 12" Sidestep
- Winch Mounting Plate (12,000 lb. rating)
- Dual Wheels
- Break Away Kit
- Protected Wiring
- LED Lighting Package
- Lockable Front Toolbox with Built-in Friction Hinge
- Lippert Brand Axles
- Radial Tires
- Engineered One Piece Continuous Weld Gooseneck
- Engineered Robotically Welded Continuous Main Beam with Integrated Beavertail
- 3/4" Precambered Deck
- Spare Tire Carrier

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lbs.	Axle:	(3) 10,000 lbs. w/ Electric Brakes
Safety Chains:	25,000 lbs. 3/8" x 35" w/Clevis Slip Hook	Suspension:	Multi-Leaf Spring w/ Equalizer
Crossmember:	S3.0" x 2.9 LBS High Tensile 80 KSI Super Lite I-Beam: 16" Centers	Tires:	ST235/80R E 10 Ply 16 x 6; Steel 8 Bolt
Lights:	L.E.D. DOT Stop, Tail, Turn, & Clearance	Brakes:	Electric
Floor:	2x8 Spuce Kiln Dried dimensional lumber	Elec. Plug:	
Jack:	12,000 lbs. Bolt-On 13.5" Lift Drop Leg Spring Loaded Front Pull Pin		
Frame:	Engineered 90 KSI Built Up Main Beam		
Side Rails:	5" x 2" HSS Tubing 2" x 0.375" rub rail, Stake pockets and chain spools, 24" spacing		
Neck:	Engineered Continuous Beam Web: 90 KSI high strength steel Flanges: 4" x 0.375" steel bar		

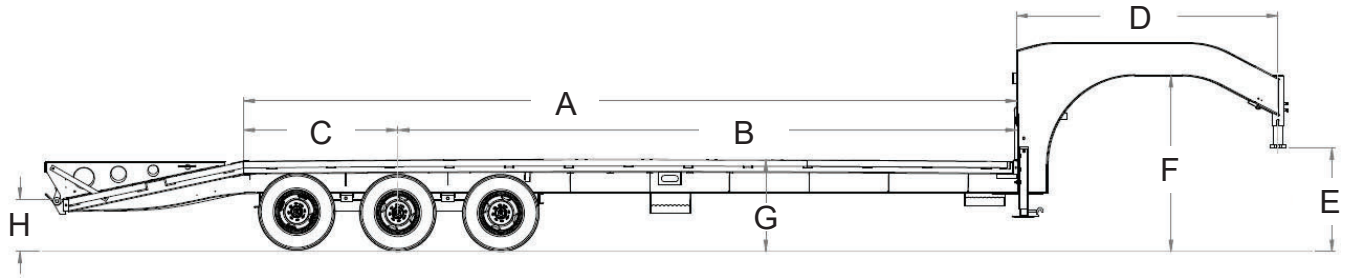

Dimensions

Model	A	B	C	D	E	F	G	H
ETGTR10-24 + 6	288"	230.125"	57.875"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"
ETGTR10-26 + 6	312"	249"	63"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"
ETGTR10-28 + 6	336"	266"	70"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"
ETGTR10-30 + 6	360"	301.938"	58.062"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"
ETGTR10-32 + 6	384"	319.25"	64.75"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"
ETGTR10-34 + 6	408"	336.375"	71.625"	105.3125"	32.5" - 40.75"	70.3125"	36.75"	21"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR10-24	24' 10,000 lbs. Triple Axle Dual Black	6,146 lb.	29,059 lb.	22,913 lb.
ETGTR10-26	26' 10,000 lbs. Triple Axle Dual Black	7,105 lb.	29,059 lb.	21,954 lb.
ETGTR10-28	28' 10,000 lbs. Triple Axle Dual Black	7,343 lb.	29,059 lb.	21,716 lb.
ETGTR10-30	30' 10,000 lbs. Triple Axle Dual Black	7,669 lb.	29,059 lb.	21,390 lb.
ETGTR10-32	32' 10,000 lbs. Triple Axle Dual Black	7,894 lb.	29,059 lb.	21,165 lb.
ETGTR10-34	34' 10,000 lbs. Triple Axle Dual Black	8,007 lb.	29,059 lb.	21,052 lb.

Standard Parts

Part# 52609 – AXLE 10GD865E-SPR 74.0" X 46.0" US W/ SPRINGS

Part#1332 – LIGHT CLEARANCE RED 0.6875" ROUND LED W/GROMMET

Part# 2305 – BOX JUNCTION 7 POLE STANDARD PLASTIC AUTO

Part# 2440 – LIGHT LICENSE PLATE SURFACE MOUNT MINI CHROME - LED

Part# 56440 – BREAKAWAY SYSTEM ENGAGER – NO LED

Part#65823 – LIGHT MID-TURN AMBER 6.5" X 2.25" REFLECTIVE OVAL LED

Part# 63020 – COUPLER GOOSENECK 30000# 2.3125" BALL ROUND STEM INNER & OUTER ASSEMBLY

Part#57637 – LIGHT STOP TURN TAIL RED 6.5" X 2.25" OVAL LED – 10 DIODE

Part# 2259 – JACK SIDEWIND 12000# WELD-ON 13.5" LIFT DROP LEG SPRING LOADED FRONT PULL PIN

Part# 57657 – PLUG AND MOLDED 7 WIRE LEAD 9.0' LONG - COLD WEATHER HD

Part# 1329 – LIGHT CLEARANCE AMBER 0.6875" ROUND LED W/ GROMMET

Part# 61187 – TIRE ASSEMBLY 235/80R16 E 10 PLY 8 HOLE STEEL OEM DUAL



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised February 2023