




### Standard Features

- Hydraulically Powered 12' Beavertail
- Hydraulic Front Jacks
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail, Stake Pockets, Rub rail, Pipe spools

### Specifications

<b>Coupler:</b>	2 5/16" Ball Coupler 30,000 lb.	<b>Axle:</b>	(2) 16,000 lb.
<b>Safety Chains:</b>	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook	<b>Suspension:</b>	Multi-Leaf Spring w/ Equalizer
<b>Crossmember:</b>	1.25" SCH40 Steel Pipe	<b>Wheels:</b>	ST235/75R17.5 H 16ply
<b>Lights:</b>	L.E.D. DOT Stop, Tail, Turn & Clearance	<b>Brakes:</b>	Electric
<b>Deck:</b>	2" x 8" Plank Decking	<b>Elec. Plug:</b>	Cold Weather 7 Wire RV Plug
<b>Jack:</b>	Hydraulic 14,000 lb. Bolt-On, 2.50" Bore, 20" Stroke		
<b>Frame:</b>	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
<b>Side Rails:</b>	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
<b>Neck:</b>	Engineered One Piece Continuous Weld 90ksi Gooseneck		

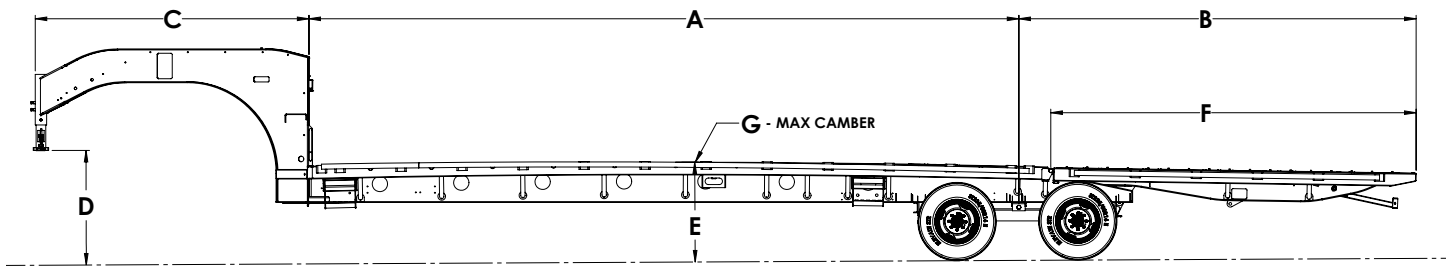

## Dimensions

Model	A	B	C	D	E	F	G
ETGT16-28 HBT	182.5"	155.125"	107.625"	42.125"	36.625"	143.625"	0.6875"
ETGT16-32 HBT	230.5"	155.125"	107.625"	42.125"	37"	143.625"	1.125"
ETGT16-36 HBT	278.5"	155.125"	107.625"	42.125"	37.5"	143.625"	1.625"
ETGT16-40 HBT	326.5"	155.125"	107.625"	42.125"	38.125"	143.625"	2.25"
ETGT16-44 HBT	374.5"	155.125"	107.625"	42.125"	38.875"	143.625"	2.9375"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT16-28 HBT	28' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,300 lb.	30,000 lb.	21,700 lb.
ETGT16-32 HBT	32' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	8,705 lb.	30,000 lb.	21,295 lb.
ETGT16-36 HBT	36' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,105 lb.	30,000 lb.	20,895 lb.
ETGT16-40 HBT	40' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,505 lb.	30,000 lb.	20,495 lb.
ETGT16-44 HBT	44' 16,000 lb. Tandem Axle Dual Hydraulic Beavertail Black	9,905 lb.	30,000 lb.	20,095 lb.

## GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGT16-28 HBT	8,300 lb.	38,000 lb.	29,700 lb.
ETGT16-32 HBT	8,705 lb.	38,000 lb.	29,295 lb.
ETGT16-36 HBT	9,105 lb.	38,000 lb.	28,895 lb.
ETGT16-40 HBT	9,505 lb.	38,000 lb.	28,495 lb.
ETGT16-44 HBT	9,905 lb.	38,000 lb.	28,095 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised November 2024