



SL716-14K 7' x 16', 14,000 lb. Tandem Axle Dump Trailer




Standard Features

- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	Floor & Wall:	10ga Floor / 12ga Wall
Hoist:	Champion C620T 14 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb. Top Wind Bolted	Lights:	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	Electric Plug:	7 Wire RV
Wheels:	235/80R16 E Steel	Safety Chains:	16,200 lb.
Tailgate:	Steel Barn Door & Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	50°

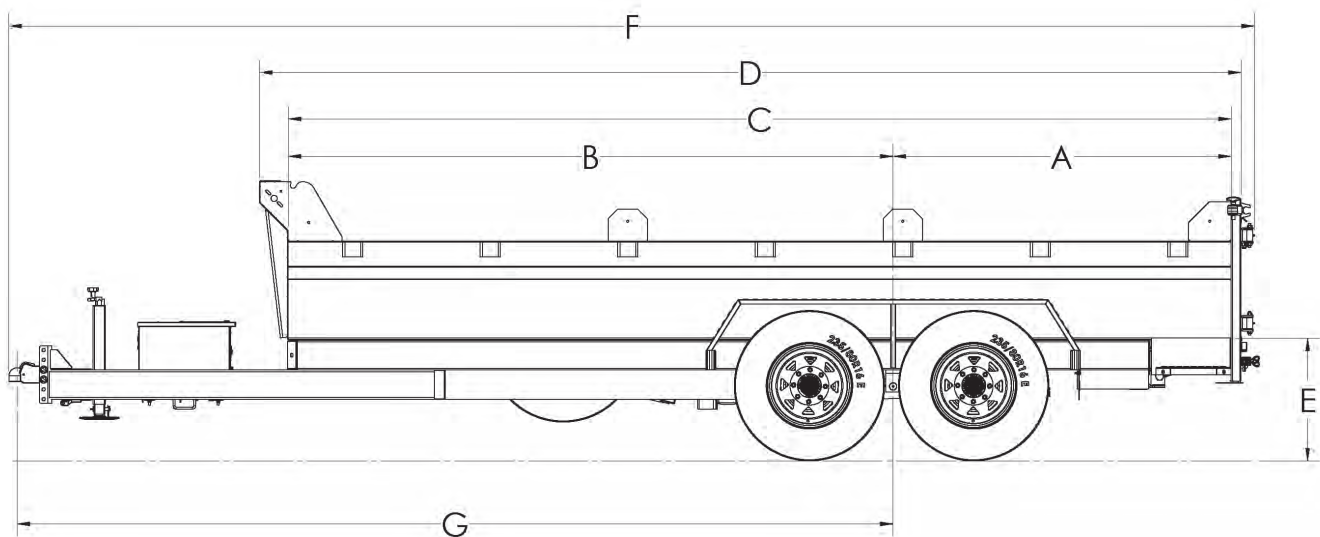

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL716-14K	68 7/8"	123 1/8"	192"	199 7/8"	25"	253 9/16"	178 3/8"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL716-14K	7' x 16' 14,000 lb. Tandem Axle Black/Charcoal	4,020 lb.	15,400 lb.	11,380 lb.



THE CANADIAN
WELDING BUREAU

SOUTHLAND
TRAILERS



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised December 2025