



Gooseneck Equipment Trailer 10K Tridem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(3) 10,000 lb.
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	41"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb., Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb. High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb. 1/2" x 42.0" w/Clevis Slip Hook		

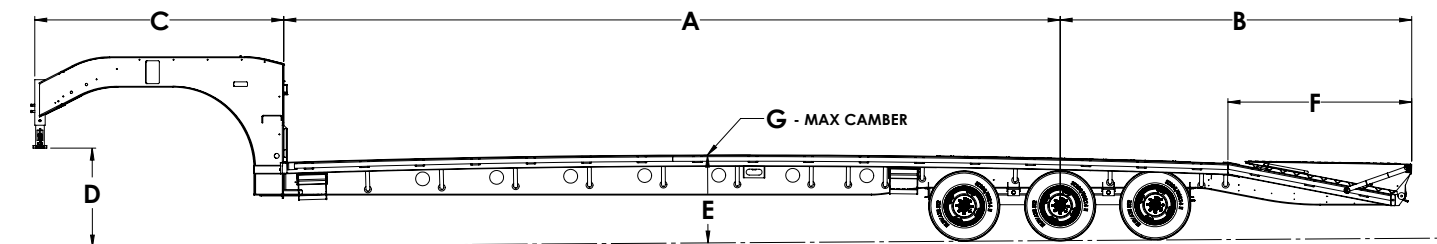

Dimensions

Model	A	B	C	D	E	F	G
ETGTR10-22 BT	192.375"	151.25"	107.625"	40.625"	35.75"	79.125"	1.3125"
ETGTR10-24 BT	216.375"	151.25"	107.625"	40.625"	36"	79.125"	1.625"
ETGTR10-26 BT	240.375"	151.25"	107.625"	40.625"	36.25"	79.125"	1.875"
ETGTR10-28 BT	264.375"	151.25"	107.625"	40.625"	36.5"	79.125"	2.1875"
ETGTR10-30 BT	288.375"	151.25"	107.625"	40.625"	36.75"	79.125"	2.5625"
ETGTR10-32 BT	312.375"	151.25"	107.625"	40.625"	37.5"	79.125"	2.875"
ETGTR10-34 BT	336.375"	151.25"	107.625"	40.625"	38"	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGTR10-22 BT	22' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	7,700 lb.	30,000 lb.	22,300 lb.
ETGTR10-24 BT	24' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,065 lb.	30,000 lb.	21,935 lb.
ETGTR10-26 BT	26' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,245 lb.	30,000 lb.	21,755 lb.
ETGTR10-28 BT	28' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,608 lb.	30,000 lb.	21,392 lb.
ETGTR10-30 BT	30' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,710 lb.	30,000 lb.	21,290 lb.
ETGTR10-32 BT	32' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	8,970 lb.	30,000 lb.	21,030 lb.
ETGTR10-34 BT	34' 10,000 lb. Tridem Axle Dual Black Beavertail w/ 6' HD Ramps	9,170 lb.	30,000 lb.	20,830 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGTR10-22 BT	7,825 lb.	36,000 lb.	28,175 lb.
ETGTR10-24 BT	8,190 lb.	36,000 lb.	27,810 lb.
ETGTR10-26 BT	8,370 lb.	36,000 lb.	27,630 lb.
ETGTR10-28 BT	8,733 lb.	36,000 lb.	27,267 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGTR10-30 BT	8,835 lb.	36,000 lb.	27,165 lb.
ETGTR10-32 BT	9,095 lb.	36,000 lb.	26,905 lb.
ETGTR10-34 BT	9,295 lb.	36,000 lb.	26,705 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised April 2026