



Gooseneck Equipment Trailer 16K Tandem Dual Wheel Beavertail




Standard Features

- 6 Ft Beavertail with 6 FT fold over HD Ramps
- Lockable Front Toolbox
- High tensile steel continuous weld Gooseneck
- Main Beam - Engineered Robotically Welded High Tensile Steel
- HD Fir Screwed Deck
- Constant Radius Cambered Deck
- Low Profile Bed, Pierced-Beam Frame
- High Tensile Steel Crossmembers
- Winch plate, Locking chain rail
- Stake Pockets, Rub rail, Pipe spools

Specifications

Coupler:	2 5/16" Ball Coupler 30,000 lb.	Axle:	(2) 16,000 lb
Suspension:	Multi-Leaf Spring w/ Equalizer	Axle Spread:	48.5"
Crossmember:	1.25" SCH40 Steel Pipe	Wheels:	ST235/80R16 E 10ply
Lights:	L.E.D. DOT Stop, Tail, Turn & Clearance	Brakes:	Electric
Deck:	2" x 8" Fir Plank Decking	Elec. Plug:	Cold Weather 7 Wire RV Plug
Jack:	12,000 lb, Bolted, 13.5" Lift, Spring Loaded Front Pull Pin Drop Leg		
Frame:	90ksi Engineered Pierced-Beams w/ S3.0" x 2.9 lb High Tensile 80ksi Super Lite I-Beams		
Side Rails:	5" x 2" HSS Tubing, 2" x 3/8" Flat Bar Rub Rails, Chain Spools & Stake Pockets		
Neck:	Engineered One Piece Continuous Weld 90ksi Gooseneck		
Safety Chains:	45,200 lb 1/2" x 42.0" w/Clevis Slip Hook		

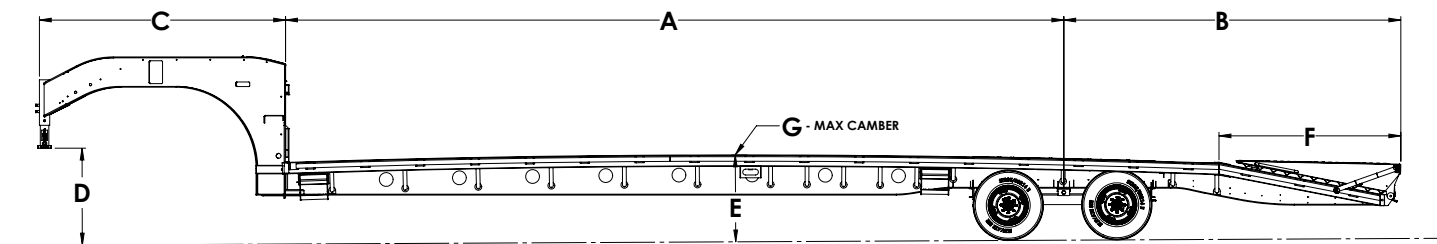

Dimensions

Model	A	B	C	D	E	F	G
ETGT16-22 BT	196.25"	147.375"	107.625"	39.25	34.25	79.125"	1.3125"
ETGT16-24 BT	220.25"	147.375"	107.625"	39.25	34.5	79.125"	1.625"
ETGT16-26 BT	244.25"	147.375"	107.625"	39.25	34.75	79.125"	1.875"
ETGT16-28 BT	268.25"	147.375"	107.625"	39.25	35	79.125"	2.1875"
ETGT16-30 BT	292.25"	147.375"	107.625"	39.25	35.5	79.125"	2.5625"
ETGT16-32 BT	316.25"	147.375"	107.625"	39.25	35.75	79.125"	2.875"
ETGT16-34 BT	340.25"	147.375"	107.625"	39.25	36.25	79.125"	3.3125"

Useable Deck Width	Outside of Rub Rails
97.25"	102"

Model	Description	Net Weight	GVWR	Payload Cap.
ETGT16-22 BT	22' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	7,985 lb.	30,000 lb.	22,015 lb.
ETGT16-24 BT	24' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,210 lb.	30,000 lb.	21,790 lb.
ETGT16-26 BT	26' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,430 lb.	30,000 lb.	21,570 lb.
ETGT16-28 BT	28' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,650 lb.	30,000 lb.	21,350 lb.
ETGT16-30 BT	30' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	8,870 lb.	30,000 lb.	21,130 lb.
ETGT16-32 BT	32' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	9,090 lb.	30,000 lb.	20,910 lb.
ETGT16-34 BT	34' 16,000 lb. Tandem Axle Dual Black Beavertail w/ 6' HD Ramps	9,310 lb.	30,000 lb.	20,690 lb.

GVWR Upgrade Options

Model	Net Weight	GVWR	Payload Cap.
ETGT16-22 BT	8,110 lb.	38,000 lb.	29,890 lb.
ETGT16-24 BT	8,335 lb.	38,000 lb.	29,665 lb.
ETGT16-26 BT	8,555 lb.	38,000 lb.	29,445 lb.
ETGT16-28 BT	8,775 lb.	38,000 lb.	29,225 lb.

Model	Net Weight	GVWR	Payload Cap.
ETGT16-30 BT	8,995 lb.	38,000 lb.	29,005 lb.
ETGT16-32 BT	9,215 lb.	38,000 lb.	28,785 lb.
ETGT16-34 BT	9,435 lb.	38,000 lb.	28,565 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised August 2026