



SL714-14K 7' x 14', 14,000 lb. Tandem Axle Dump Trailer




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- NEW 6" Scissor Hoist – Power Up / Power Down
- NEW Corner Located D-Rings
- Upgraded 2" Thick Rear Door Panels
- Stake Pockets
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	Floor & Wall:	10ga Floor / 12ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) 4,000 lb. Midspan Ramps (65 lbs. each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Brakes:	Electric
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

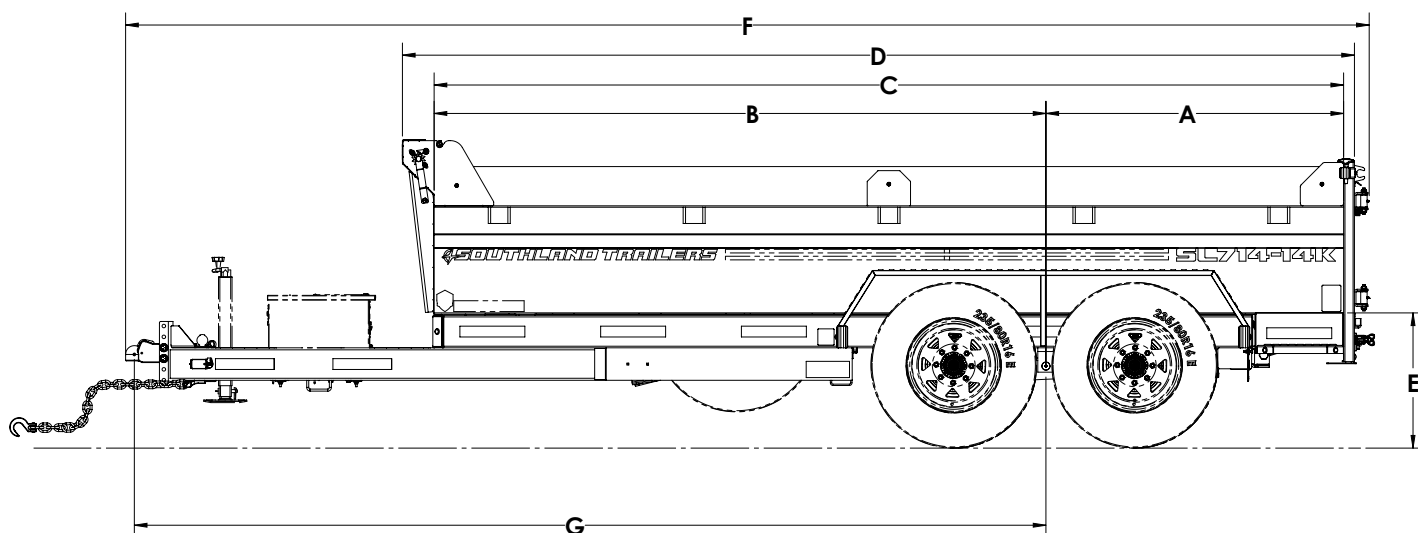

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-14K	55"	113"	168"	175 7/8"	25"	229 11/16"	168 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-14K	7' x 14' 14,000 lb. Tandem Axle Black/Charcoal	3,615 lb.	15,400 lb.	11,785 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL714-14KHS

7' x 14', 14,000 lb. High Side Tandem Axle Dump Trailer with 2-Way Tailgate




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- NEW 6" Scissor Hoist – Power Up / Power Down
- NEW Corner Located D-Rings
- NEW Galvanized Steel Bolt-on Front Step
- Stake Pockets
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Galvanized Steel Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 7,000 lb. Lippert Spring	Floor & Wall:	10ga Floor / 12ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	7,000 lb, Bolted, Top wind, Pull Pin Drop Leg	Lights:	LED
Ramp:	(2) Galvanized Steel 4,000 lb Midspan Ramps (65 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/80R16 E Steel	Brakes:	Electric
Tailgate:	Steel Barn Door w/ Over Centre Latch	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

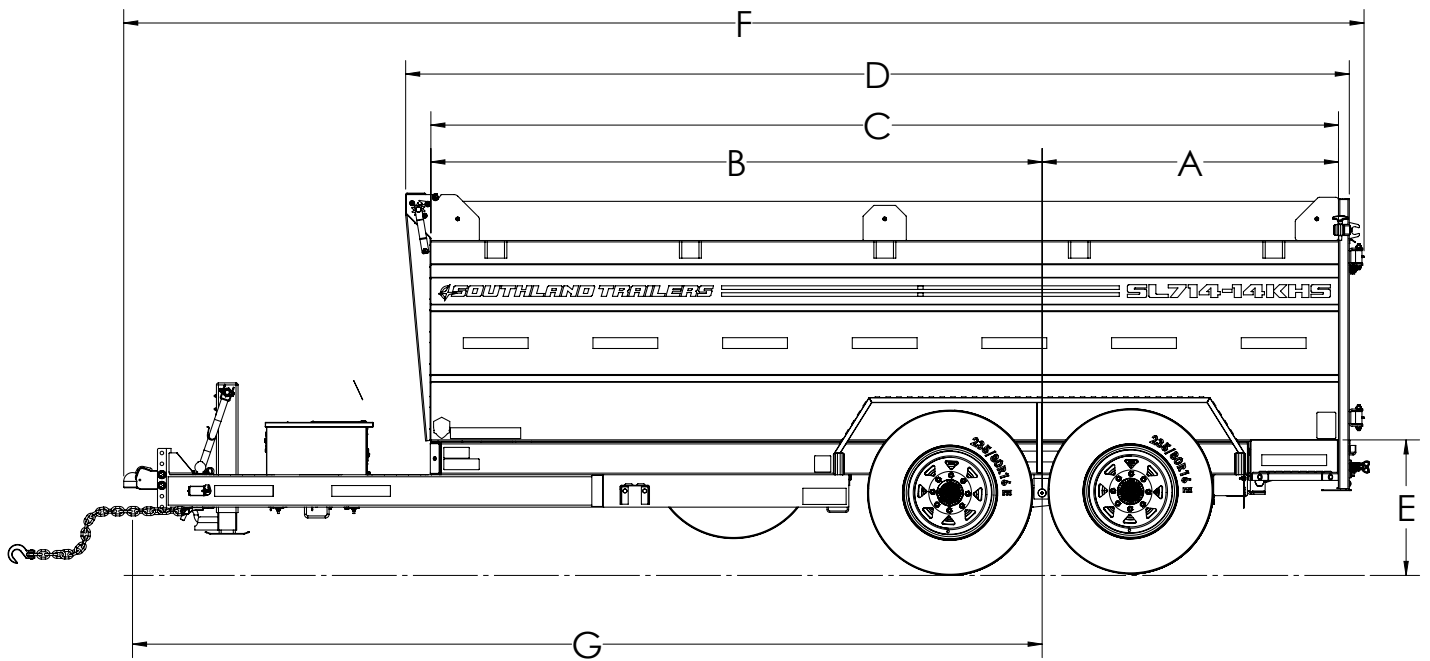

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-14KHS	54 7/8"	113 1/8"	168"	174 11/16"	25 1/16"	231 11/16"	168 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-14KHS	7' x 14' 14,000 lb. Tandem Axle Black/Charcoal	3,902 lb.	15,400 lb.	11,498 lb.



THE CANADIAN
WELDING BUREAU



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL714-16K

7' x 14', 16,000 lb.

Tandem Axle Dump Trailer




Standard Features

- Stake Pockets
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Aluminum Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb Lippert Spring	Floor & Wall:	10ga Floor / 10ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	12,000 lb, Bolted, Side Wind	Lights:	LED
Ramp:	(2) 4,500 lb Midspan Ramps (33 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 F Steel	Brakes:	Electric
Tailgate:	Steel 3-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb. Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

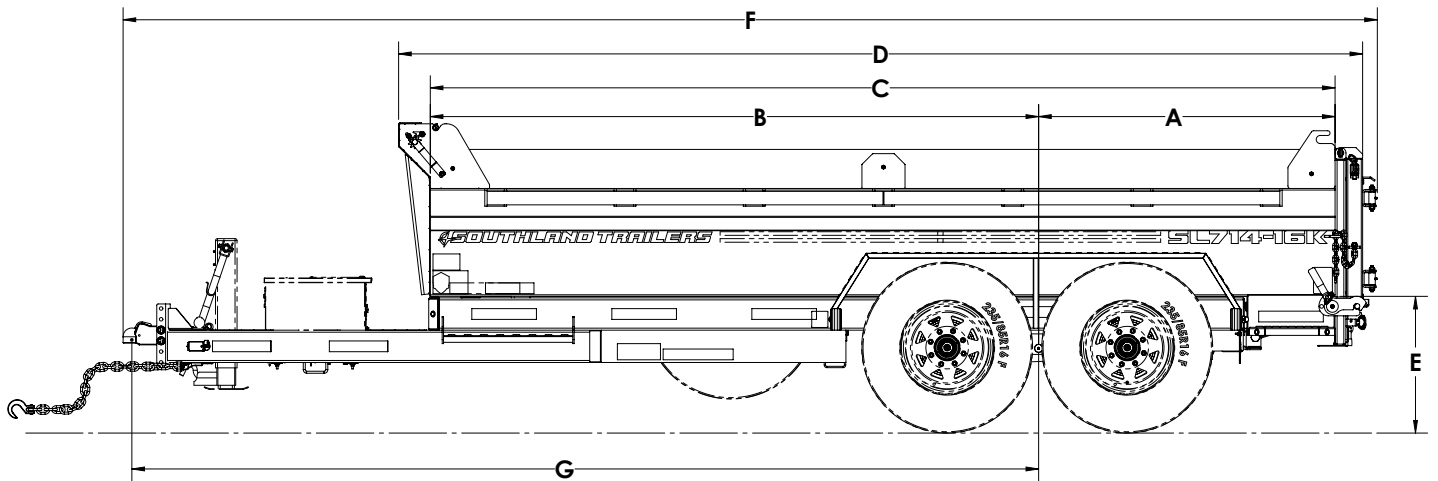

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-16K	55 1/16"	112 15/16"	168"	179"	25 3/8"	232 7/8"	168 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16K	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,078 lb.	17,420 lb.	13,342 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL714-16KHD

7' x 14', 16,000 lb.

Heavy Duty Tandem Axle Dump Trailer




Standard Features

- Stake Pockets and Rub Rails
- HD Front/Rear Side Steps
- 8K Slipper Spring Axles
- 3-Way Gate
- Scissor Hoist – Power Up / Power Down
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Aluminum Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb Lippert Spring	Floor & Wall:	3/16" Floor / 10ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	8,000 lb, Bolted, Hydraulic	Lights:	LED
Ramp:	(2) Aluminum 4,500 lb Midspan Ramps (34 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 G Steel	Brakes:	Electric
Tailgate:	Steel 3-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

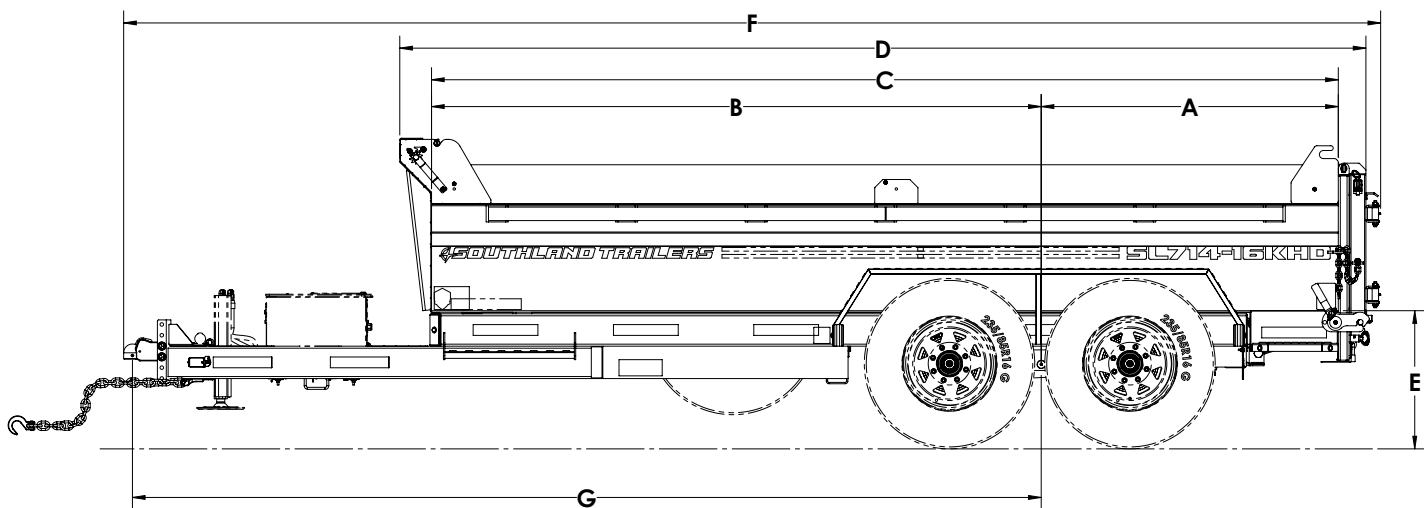

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-16KHD	55 1/16"	112 15/16"	168"	179"	25 5/8"	232 7/8"	168 3/8"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16KHD	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,229 lb.	17,420 lb.	13,191 lb.



THE CANADIAN
WELDING BUREAU



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026



SL714-16KHS

7' x 14', 16,000 lb. High Side Tandem Axle Dump Trailer with 2-Way Tailgate




Standard Features

- NEW Over Center Spreader Latch
- NEW Tarp Hooks
- NEW Gate Holdback Including HSS Spring Enclosure And Galvanized Steel Strike Plates
- NEW 6" Scissor Hoist – Power Up / Power Down
- NEW Corner Located D-Rings
- Stake Pockets
- Adjustable Coupler
- Aluminum Toolbox
- 110V Battery Charger
- 10W Solar Panel
- PPG DTM 2 Part Epoxy Paint
- Fully Enclosed Wiring
- HSS Structural Tubing
- Engineered Sill Design
- Spare Tire*
- Aluminum Slide in Ramps*
- Roll Up Tarp*
- Rear Drop Down Stabilizer Jacks*
- 8" Side Boards*

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb Lippert Spring	Floor & Wall:	10ga Floor / 10ga Wall
Hoist:	Scissor Hoist 6" Bore X 15" Stroke 9 Ton	Frame:	6 X 2 HSS
Jack:	12,000 lb, Bolted, Side Wind	Lights:	LED
Ramp:	(2) Aluminum 4,500 lb Midspan Ramps (34 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 F Steel	Brakes:	Electric
Tailgate:	Steel 2-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	45°
Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook		

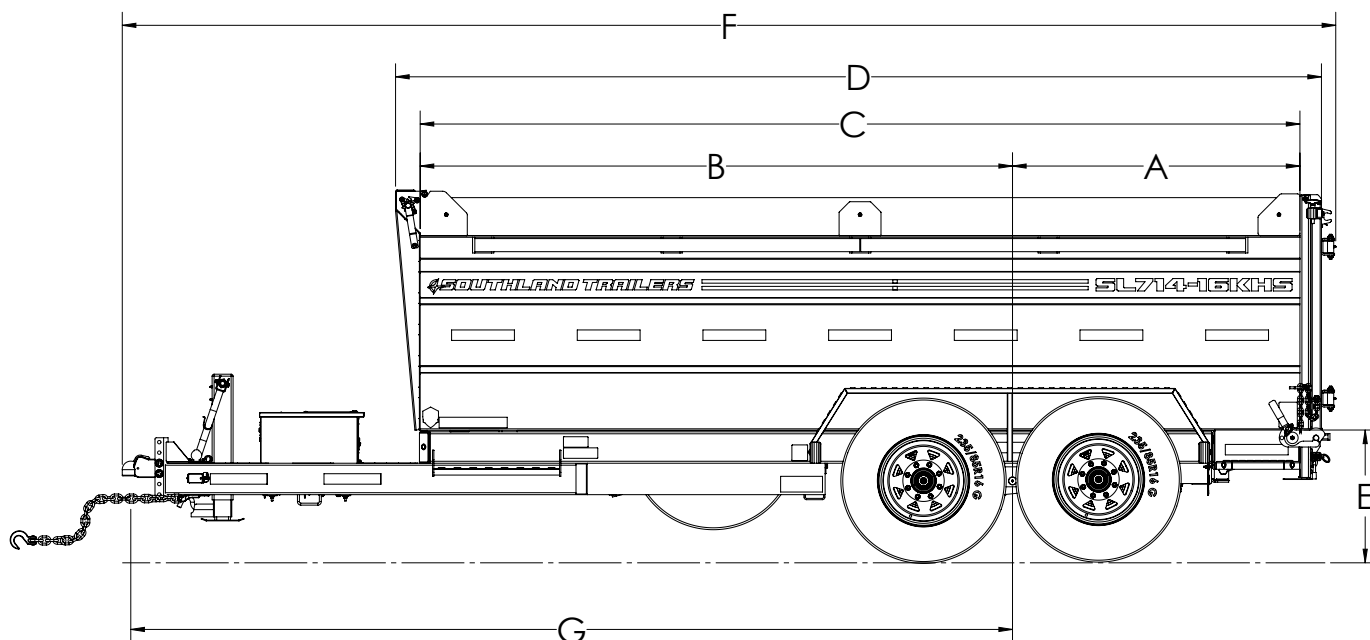

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL714-16KHS	54 7/8"	113 1/8"	168"	176 13/16"	25 1/2"	231 3/4"	168 3/8"	82"

Model	Description	Net Weight	GVWR	Payload Cap.
SL714-16KHS	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,460 lb.	17,420 lb.	12,960 lb.



Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Products. - Revised September 2026