



SL716-16KHD 7' x 16', 16,000 lb. Heavy Duty Tandem Axle Dump Trailer




Standard Features

- Stake Pockets
- HSS structural Tubing
- Scissor Hoist
- Engineered Sill Design
- Adjustable Coupler
- Spare Tire
- Aluminum Toolbox
- Aluminum Slide-In Ramps
- 110V Battery Charger
- Roll-Up Tarp
- 10W Solar Panel
- Rear Drop Down Stabilizer Jacks
- PPG DTM 2 Part Epoxy Paint
- 8" Side Boards
- Fully Enclosed Wiring
- HD Welded Front Step

*Dealer Specific Options

Specifications

Axle:	(2) 8,000 lb Lippert Spring	Floor & Wall:	3/16" Floor / 10ga Wall
Hoist:	Scissor Hoist 6" Bore X 20" Stroke 14 Ton	Frame:	6 X 2 HSS
Jack:	8,000 lb, Bolted, Hydraulic	Lights:	LED
Ramp:	(2) Galvanized Steel 4,500 lb Midspan Ramps (65 lbs Each)	Electric Plug:	Cold Weather 7 Wire RV
Wheels:	235/85R16 G Steel	Safety Chains:	16,200 lb 5/16" w/Clevis Slip Hook
Tailgate:	Steel 3-Way Barn/Spreader	Paint Specs:	PPG 2-Part Epoxy DTM
Coupler:	21,000 lb Demco Adjustable	Dump Angle:	50°

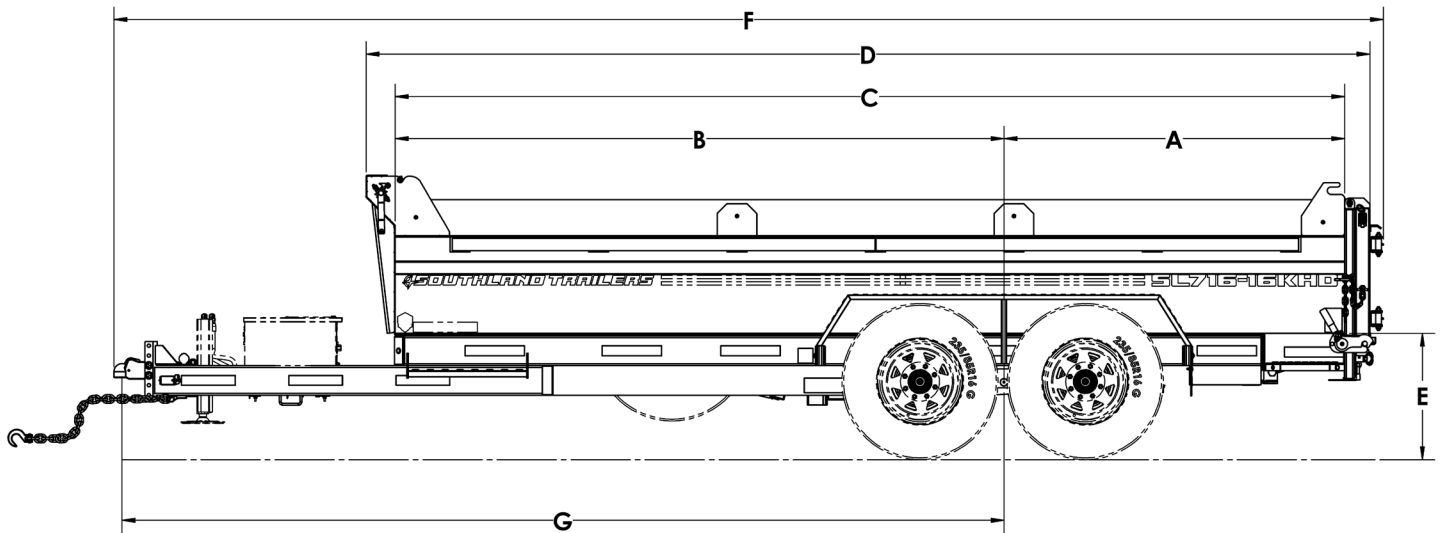

Dimensions

Model	A	B	C	D	E	F	G	Box Width
SL716-16KHD	68 7/8"	123 1/8"	192"	203"	25 9/16"	256 3/4"	178 3/8"	82 1/2"

Model	Description	Net Weight	GVWR	Payload Cap.
SL716-16KHD	7' x 14' 16,000 lb. Tandem Axle Black/Charcoal	4,812 lb.	17,420 lb.	12,608 lb.



Specs are subject to change without notice. Please contact Southland Trailers Product Specialist for price confirmation on all Products. - Revised September 2026